COMPLIANCE TEST REPORT

RECEIVED

APR 1, 1 2016

AIR QUALITY DIV.

for

CARBON MONOXIDE EMISSIONS (CO)

UNITS 11-1 to 11-5

SRN: B2804

Wilmot Substation Kingston Twp., Michigan

February 10-11, 2016

Prepared By
Environmental Management & Resources
Environmental Field Services Group
DTE Corporate Services, LLC
7940 Livernois H-136
Detroit, MI 48210

DTE Energy®



DTE Energy[®]



RECEIVED

APR 1 1 2016

AIR QUALITY DIV.

EXECUTIVE SUMMARY

DTE Energy's Environmental Management and Resources (EM&R) Field Services Group, performed emissions testing on five (5) 3,600 Brake-HP diesel engines located at the Wilmot Substation in Kingston Twp, Michigan. The fieldwork, performed on February 10-11, 2016 was conducted to satisfy requirements of 40CFR Part 63 Subpart ZZZZ. Emission tests were performed on Units 11-1 to 11-5 for carbon monoxide (CO) destruction efficiency.

The results of the emissions testing are highlighted below:

CO Emissions Test Results Wilmot Substation February, 2016

Date	Unit	Average CO Destruction Efficiency (%)
2-10-16	11-5	78.9
2-10-16	11-4	74.4
2-11-16	11-3	82.2
2-11-16	11-2	81.7
2-11-16	11-1	72.3

Subpart ZZZZ Limit: Limit the concentration of CO in the stationary RICE exhaust to 23 ppmvd or less at 15% O2; or Reduce CO emissions by 70% or more



1.0 INTRODUCTION

DTE Energy's Environmental Management and Resources (EM&R) Field Services Group, performed emissions testing on five (5) 3,600 Brake-HP diesel engines located at the Wilmot Substation in Kingston Twp, Michigan. The fieldwork, performed on February 10-11, 2016 was conducted to satisfy requirements of 40CFR Part 63 Subpart ZZZZ. Emission tests were performed on Units 11-1 to 11-5 for carbon monoxide (CO) destruction efficiency.

Testing was performed pursuant to Title 40, Code of Federal Regulations, Part 60, Appendix A (40 CFR §60 App. A), Methods 3A and 10.

The fieldwork was performed in accordance with EPA Reference Methods, the requirements outlined in 40CFR Part 63 Subpart ZZZZ, and EM&R's Intent to Test¹, Test Plan Submittal, which was approved in a letter by Mr. Tom Gasloli from the Michigan Department of Environmental Quality (MDEQ), dated June 8, 2015. The following EM&R personnel participated in the testing program: Mr. Thomas Snyder, Senior Technician, and Mr. Mark Grigereit, Principal Engineer. Mr. Dan Drake, Operator with DTE - Electric, and Mr. Rahn Ledesma, Reliability Supervisor with DTE Electric, provided process coordination for the testing program. Mr. Ben Witkopp, MDEQ, witnessed portions of the testing.

2.0 SOURCE DESCRIPTION

The Wilmot Substation located at 5977 East Bevins Rd, Kingston Twp., Michigan, employs the use of five EM&D, MP45, 20 cylinder, 3,600 Horse Power diesel engines (Units 11-1 to 11-5). The engines generate supplemental electrical power during peak electrical demand periods or when required for load stability. On site diesel generators produce the electrical power supply which is sent to the electrical grid. Each unit is capable of producing approximately 2.5 GMW at full load conditions.

The emissions from the engines are exhausted through individual catalyst beds and to the atmosphere through individual exhaust stacks.

During the emissions testing the engines were operated at 100% load conditions (2.5 MW).

A schematic representation of the engines exhausts and sampling locations are presented in Figure 1. Sampling was performed in the duct prior to and downstream of the catalyst bed.

¹ MDEQ, Test Plan, Submitted May 6, 2015. (Attached-Appendix A)

² MDEQ, Approval Letter (Attached-Appendix A)



3.0 SAMPLING AND ANALYTICAL PROCEDURES

DTE Energy obtained emissions measurements in accordance with procedures specified in the USEPA *Standards of Performance for New Stationary Sources*. The sampling and analytical methods used in the testing program are indicated in the table below:

Sampling Method	Parameter	Analysis
USEPA Method 3A	Oxygen	Instrumental Analyzer Method
USEPA Method 10	Carbon Monoxide	NDIR Instrumental Analyzer Method

3.1 OXYGEN AND CARBON MONOXIDE (USEPA METHODS 3A AND 10)

3.1.1 Sampling Method

Oxygen (O₂) emissions were evaluated using USEPA Method 3A, "Gas Analysis for Carbon Dioxide, Oxygen, Excess Air, and Dry Molecular Weight (Instrumental Analyzer Method)". The O₂ analyzer utilizes a paramagnetic sensor.

Carbon monoxide (CO) emissions were evaluated using USEPA Method 10, "Determination of Carbon Monoxide Emissions from Stationary Sources". The CO analyzer utilizes a NDIR detector.

3.1.2 O₂ and CO Sampling Train

The EPA Methods 3A and 10 sampling systems at the inlet and outlet (Figure 2) consisted of the following components:

- (1) Single-point stainless steel sampling probe with a cintered filter.
- (2) Heated Teflon™ sampling line.
- (3) Universal[®] and MAK[®] gas conditioners with a particulate filter.
- (4) Flexible unheated Teflon™ sampling line.
- (5) Servomex 1400 O_2/CO_2 gas analyzer and TECO 48i NDiR CO gas analyzer.
- (6) USEPA Protocol 1 calibration gases.
- (7) Data Acquisition System.



3.1.3 Sampling Train Calibration

The O_2 / CO sampling trains were calibrated according to procedures outlined in USEPA Methods 3A & 10. Zero, span, and mid range calibration gases were introduced directly into the CO and O_2 analyzers to determine the instruments linearity. A zero and mid range span gas was then introduced through the entire sampling system to determine sampling system bias for each analyzer. Additional system calibrations were performed at the completion of each test.

3.1.4 Sampling Duration & Frequency

The emissions testing of each engine consisted of triplicate 60-minute samples at the inlet and exhaust of the catalyst. Stratification testing was conducted at three points across the diameter of the exhaust duct during the first run on each engine. Emissions testing of the first run demonstrated an absence of stratification (<1%), therefore a single centroid sampling point was selected. Sampling was performed simultaneously for O_2 and CO. Data was recorded as 1-minute averages.

3.1.5 Quality Control and Assurance (O₂ and CO)

All sampling and analytical equipment was calibrated according to the guidelines referenced in Methods 3A and 10. Calibration gases were EPA Protocol 1 gases and the concentrations were within the acceptable ranges (40-60% mid range and span) specified in Method 7E. Calibration gas certification sheets are located in Appendix C.

3.1.6 Data Reduction

The O_2 and CO emission readings in percent (%) and parts per million (ppm) were recorded at 10-second intervals and averaged to 1-minute increments. The CO emissions were normalized to 15% O_2 , and that number was used to determine CO % Destruction Efficiency (DE) as required by 40CFR Part 63 Subpart ZZZZ. Emission calculations are based upon calculations found in USEPA Methods 3A, 7E, 10 and 19. Example calculations can be found in Appendix D.

The 1-minute O₂ and CO readings collected can be found in Appendix B.

4.0 OPERATING PARAMETERS

The test program included the collection of catalyst inlet temperature (${}^{\circ}F$), catalyst pressure drop (" H_2O), and crank case vacuum (" H_2O). Ambient temperature (${}^{\circ}F$), Relative Humidity (%), and Barometric Pressure (in) were also gathered from the closest weather station. Operational and atmospheric data collected during the testing is located in Appendix E.

DTE Energy[®]



5.0 RESULTS

Tables 1-5 present the CO emissions @ 15% O₂ results from Units 11-1 to 11-5. The CO emissions are presented in parts per million (ppm) for the inlet and outlet and the destruction efficiency in percent (%). Also presented are the Oxygen inlet and outlet in percent (%), the catalyst inlet temperature in degrees Fahrenheit (°F), and pressure drop across the catalyst in inches of water ("H₂O). The results of the testing indicate that Units 11-1 to 11-5 are in compliance with 40CFR Part 63 Subpart ZZZZ requirements of reducing CO emissions by 70% or more.



6.0 CERTIFICATION STATEMENT

"I certify that I believe the information provided in this document is true, accurate, and complete. Results of testing are based on the good faith application of sound professional judgment, using techniques, factors, or standards approved by the Local, State, or Federal Governing body, or generally accepted in the trade."

Thomas Snyder, OSTI

This report prepared by:

Mr. Thomas Snyder, QSTI

Senior Environmental Technician, Field Services Group

Environmental Management and Resources

DTE Energy Corporate Services, LLC

This report reviewed by:

Mr. Mark Grigereit, QST

Principal Engineer, Field Services Group

Environmental Management and Resources

DTE Energy Corporate Services, LLC





RESULTS TABLES



TABLE NO. 1 CARBON MONOXIDE (CO) EMISSION TESTING RESULTS

Unit 11-5 Wilmot Substation February 10, 2016

			Catalyst	Catalyst	Oxygen ⁽¹⁾		CO Emissions @ 15% O _z ⁽¹⁾		Destruction	
Test	Time	Load (MW)		Pressure Drop ("H ₂ O)	Inlet (%)	Outlet (%)	Inlet (ppm)	Outlet (ppm)	Efficiency (%)	
Run - 1	9:02-10:02	2.5	627	0.002	13.0	12.9	54.4	10.5	80.7	
Run - 2	10:10-11:10	2.5	618	0.003	13.3	13.1	48.3	11.6	76.1	
Run - 3	11:20-12:20	<u>2.5</u>	<u>629</u>	<u>0.004</u>	<u>13.1</u>	<u>12.9</u>	<u>52.0</u>	<u>10.5</u>	<u>79.9</u>	
	Avg:	2.5	<i>625</i>	0.003	13.1	13.0	51.6	10.9	78.9	

(1) Corrected for analyzer drift per USEPA method 7E

40CFR Part 63 Subpart ZZZZ Limit: 70% DE



TABLE NO. 2 CARBON MONOXIDE (CO) EMISSION TESTING RESULTS

Unit 11-4 Wilmot Substation February 10, 2016

A REMAND OF SERVICE SHOWS A SERVICE.		Ca		Catalyst Catalyst	Oxygen ⁽¹⁾		CO Emissions @ 15% O ₂ (1)		Destruction	
Test	Time	Load (MW)	Inlet Temperature (°F)	Pressure Drop ("H ₂ O)	inlet (%)	Outlet (%)	Inlet (ppm)	Outlet (ppm)	Efficiency (%)	
Run - 1	12:29-13:45	2.5	597	0.006	13.4	13.2	48.6	12.6	74.0	
Run - 2	13:53-14:53	2.5	602	0.005	13.3	13.2	48.8	11.7	75.9	
Run - 3	15:06-16:06	<u>2.5</u>	<u>612</u>	<u>0.005</u>	<u>13.3</u>	<u>13.2</u>	<u>48.4</u>	<u>12.9</u>	<u>73.3</u>	
	Avg:	<i>2.5</i>	604	0.005	<i>13.3</i>	13.2	48.6	12.4	74.4	

(1) Corrected for analyzer drift per USEPA method 7E 40CFR Part 63 Subpart ZZZZ Limit: 70% DE



TABLE NO. 3 CARBON MONOXIDE (CO) EMISSION TESTING RESULTS

Unit 11-3 Wilmot Substation February 11, 2016

		Catalyst	Catalyst	Oxygen ⁽¹⁾		CO Emissions @ 15% O ₂ (1)		Destruction	
Test	Time	Load (MW)	Inlet Temperature (°F)	Pressure Drop ("H ₂ O)	Inlet (%)	Outlet (%)	inlet (ppm)	Outlet (ppm)	Efficiency (%)
Run - 1	8:00-9:00	2.5	671	0.005	12.9	12.7	70.8	14.6	79.4
Run - 2	9:09-10:09	2.5	669	0.006	12.9	12.7	66.8	10.8	83.8
Run - 3	10:17-11:17	<u>2.5</u>	<u>658</u>	<u>0.005</u>	<u>12.9</u>	<u>12.7</u>	<u>67.0</u>	<u>11.1</u>	<u>83.4</u>
	Avg:	2.5	<i>666</i>	0.005	12.9	12.7	<i>68.2</i>	12.2	82.2

⁽¹⁾ Corrected for analyzer drift per USEPA method 7E

40CFR Part 63 Subpart ZZZZ Limit: 70% DE

TABLE NO. 4 CARBON MONOXIDE (CO) EMISSION TESTING RESULTS

Unit 11-2 Wilmot Substation February 11, 2016

000000000000000000000000000000000000000		(0.000000000000000000000000000000000000	Catalyst	Catalyst Pressure Drop	Oxygen ⁽¹⁾		CO Emissions @ 15% O ₂ (1)		Destruction	
Test	Time	Load	Inlet Temperature		Inlet	Outlet	Inlet	Outlet	Efficiency	
		(MW)	(°F)	("H ₂ O)	(%)	(%)	(ppm)	(ppm)	(%)	
Run - 1	11:32-12:32	2.5	651	0.008	13.2	13.0	43.9	8.5	80.7	
Run - 2	12:40-13:40	2.5	647	0.007	13.2	13.0	43.0	7.9	81.6	
Run - 3	13:48-14:48	<u>2.5</u>	<u>638</u>	0.006	<u>13.2</u>	<u>13.0</u>	<u>43.7</u>	<u>7.4</u>	<u>83.0</u>	
	Avg:	<i>2.</i> 5	<i>645</i>	0.007	13.2	13.0	43.5	7.9	81.8	

(1) Corrected for analyzer drift per USEPA method 7E 40CFR Part 63 Subpart ZZZZ Limit: 70% DE



TABLE NO. 5 CARBON MONOXIDE (CO) EMISSION TESTING RESULTS

Unit 11-1 Wilmot Substation February 11, 2016

		at an orași trei	Catalyst	Catalyst	Оху	gen ⁽¹⁾	CO Emissions	. @ 15% O ₂ ⁽¹⁾	Destruction
Test	Time	Load (MW)	Inlet Temperature (°F)	Pressure Drop ("H ₂ O)	Inlet (%)	Outlet (%)	Inlet (ppm)	Outlet (ppm)	Efficiency (%)
Run - 1	14:58-15:58	2.5	628	0.003	13.4	13.3	40.9	11.7	71.3
Run - 2	16:10-17:10	2.5	627	0.004	13.4	13.3	40.0	10.8	73.0
Run - 3	17:21-18:21	<u>2.5</u>	<u>622</u>	<u>0.004</u>	<u>13.5</u>	<u>13.3</u>	<u>39.5</u>	<u> 10.9</u>	. <u>72.5</u>
	Avg:	2.5	626	0.004	13.4	13.3	40.1	11.1	<i>72.3</i>

(1) Corrected for analyzer drift per USEPA method 7E


40CFR Part 63 Subpart ZZZZ Limit: 70% DE



FIGURES



Figure 1 – Sampling Location Wilmot Substation Diesel Generators February 10-11, 2016

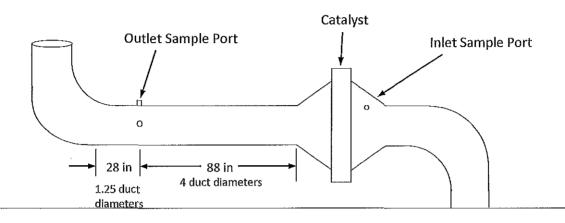

Outlet Distance

Point 1 3.67 in

Point 2 11.00 in

Point 3 18.33 in

Duct Diameter = 22 in

Diesel Generator

DTE Energy Figure 2 – EPA Methods 3A/10 **Wilmot Substation Diesel Generator** February 10-11, 2016 S.S. Probe **Heated Sample Line** Pump Moisture Removal System Calibration Line Vent Servomex O2/CO2 Analyzer TECO 48i **CO NDIR Analyzer** Flow Controller **Data Aquisition Calibration Gas**