

**SOURCE TEST REPORT
2022 ANNUAL COMPLIANCE DEMONSTRATION
BLUEWATER GAS STORAGE, LLC.
BLUEWATER GAS STORAGE STATION
UCP1, UCP3 & UCP4
COLUMBUS, MICHIGAN**

Prepared For:

Bluewater Gas Storage
333 S. Wales Center
Columbus, MI 48063

Prepared By:

Montrose Air Quality Services, LLC
1371 Brummel Avenue
Elk Grove Village, IL 60007

Document Number: **MW023AS-013309-RT-1540**
Test Date: **September 13, 2022**
Submittal Date: **November 4, 2022**



REVIEW AND CERTIFICATION

All work, calculations, and other activities and tasks performed and presented in this document were carried out by me or under my direction and supervision. I hereby certify that, to the best of my knowledge, Montrose operated in conformance with the requirements of the Montrose Quality Management System and ASTM D7036-04 during this test project.

Signature: Brandon Check Date: 11/4/2022

Name: Brandon Check Title: Client Project Manager

I have reviewed, technically and editorially, details calculations, results, conclusions, and other appropriate written materials contained herein. I hereby certify that, to the best of my knowledge, the presented material is authentic, accurate, and conforms to the requirements of the Montrose Quality Management System and ASTM D7036-04.

Signature: Matthew Libman Date: 11/4/2022

Name: Matthew Libman Title: Logistics Manager

TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
1.0 PROJECT OVERVIEW.....	4
1.1 GENERAL.....	4
1.2 EXECUTIVE SUMMARY	4
1.3 ASTM D7036-04(2011).....	5
1.4 METHODOLOGY	5
1.5 PARAMETERS	5
1.6 QUALITY STATEMENT.....	5
1.7 RESULTS	6
2.0 SUMMARY OF RESULTS.....	7
3.0 TEST PROCEDURES	10
3.1 METHOD LISTING	10
3.2 METHOD DESCRIPTIONS	10
3.2.1 Methods 3A, 7E and 10.....	10
3.2.2 Method 19	11
4.0 DESCRIPTION OF INSTALLATION.....	12

LIST OF TABLES

TABLE 1-1 EXECUTIVE SUMMARY.....	4
TABLE 1-2 PROJECT PERSONNEL	5
TABLE 2-1 SUMMARY OF EU-COMP NORTH RESULTS.....	7
TABLE 2-2 EU-COMP NORTH PROCESS DATA	7
TABLE 2-3 SUMMARY OF EU-COMP WEST RESULTS	8
TABLE 2-5 SUMMARY OF EU-COMP EAST RESULTS	9
TABLE 2-6 EU-COMP EAST PROCESS DATA.....	9
TABLE 3-1 ANALYZERS USED FOR PROJECT.....	10

LIST OF APPENDICES

APPENDIX A FIGURES
APPENDIX B SAMPLE CALCULATIONS
APPENDIX C PARAMETERS
APPENDIX D ANALYZER DATA
APPENDIX E CALIBRATION DATA
APPENDIX F ACCREDITATION/CERTIFICATION
APPENDIX G PROCESS DATA

1.0 PROJECT OVERVIEW

1.1 GENERAL

Montrose Air Quality Services, LLC (Montrose) located at 1371 Brummel Avenue, Elk Grove Village, Illinois was contracted by Bluewater Gas Storage, LLC to perform an air emission test program at the Bluewater Gas Storage Columbus Station located in Columbus, Michigan. Testing was performed to satisfy the requirements of the Michigan Department of Environmental -Quality (MDEQ) PTI, the United States Environmental Protection Agency (U.S. EPA), 40 CFR 63.6640 (c), Subpart ZZZZ, as applicable.

The specific objective of the test program is as follows:

- Determine the nitrogen oxides (NO_x) and carbon monoxide (CO) emissions from three natural gas fired, compressor engines at the Bluewater Gas Storage

Testing was performed on EU-COMP NORTH (UPC1), EU-COMP WEST (UPC3), and EU-COMP EAST (UPC4) on September 28, 2021. Coordinating the field aspects of the test program were:

James Jensen – WEC Energy Group - (414) 221-2530

Frank Rasmussen – Bluewater Gas Storage - (810) 305-3912

Brandon Check – Montrose Air Quality Services, LLC – (630) 860-4740

1.2 EXECUTIVE SUMMARY

The results of the test program are summarized in the following table.

**TABLE 1-1
 EXECUTIVE SUMMARY**

Location	NO _x (lb/hr)		CO (ppmdv@15%O ₂)		CO (lb/hr)	
	Limit	Result	Limit	Result	Limit	Result
EU-COMP WEST	7.4	4.65	47	3.59	1.85	0.243
EU-COMP EAST	7.4	2.68	47	2.17	1.85	0.141
EU-COMP NORTH	4.5	1.05	47	0.354	0.4	0.00542

1.3 ASTM D7036-04(2011)

All applicable Montrose field personnel used on-site for this test program were compliant with ASTM D7036-04(2011) "Standard Practice for Competence of Air Emissions Testing Bodies" for all tests performed. This includes having the appropriate QSTI directly supervise the testing.

The following table summarizes the key personnel that were involved with this project:

**TABLE 1-2
PROJECT PERSONNEL**

Personnel	Position on Project	Date of QSTI Exam
Brandon Check, Q.S.T.I.	Client Project Manager	04/28/2021

1.4 METHODOLOGY

The concentrations of oxygen (O₂), NO_x, and CO at the exhaust of each engine was determined using EPA Methods 3A, 7E and 10. The sample gas was withdrawn from the outlet at a constant rate through a stainless-steel probe, a glass fiber filter and a Teflon sample line. The probe, filter and sample line were operated at a minimum temperature of 250 °F to prevent the condensation of moisture. The sample gas passed through a gas cooler system. The gas cooler consists of two separate stages designed to lower the dew point of the sample gas to 35 °F, thus removing the moisture. Each stage of the gas cooler is designed to minimize contact of condensed moisture with the dry sample gas. The dry gas is then delivered to the O₂, NO_x and CO analyzers.

Three 15 minute test runs were performed at the outlet of each engine. Results from the analyzers were determined on a "dry" basis. Results are in parts per million dry volume (ppmdv), ppmdv at 15 percent (%) O₂ (ppmdv@15%) (CO only) and in pound per hour (lb/hr).

1.5 PARAMETERS

The following specific parameters were determined at each engine at the Bluewater Gas Storage Station test locations during each test run:

- oxygen concentration
- nitrogen oxides concentration
- carbon monoxide concentration

1.6 QUALITY STATEMENT

Montrose is qualified to conduct this test program and has established a quality management system that led to accreditation with ASTM Standard D7036-04 (Standard Practice for Competence of Air Emission Testing Bodies). Montrose participates in annual functional assessments for conformance with D7036-04 which are conducted by the American Association for Laboratory Accreditation (A2LA). All testing performed by Montrose is supervised on site by

at least one Qualified Individual (QI) as defined in D7036-04 Section 8.3.2. Data quality objectives for estimating measurement uncertainty within the documented limits in the test methods are met by using approved test protocols for each project as defined in D7036-04 Sections 7.2.1 and 12.10. Additional quality assurance information is presented in the report appendices.

1.7 RESULTS

A complete summary of test results is presented in Tables 2-1 through 2-6.

Testing was performed according to Test Plan No. MW023AS-013309-PP-487. The procedures outlined in that document were followed.

Sample measurements were conducted at three points on the line passing through the centroidal area at 16.7, 50.0, and 83.3 percent (%) of the measurement line. Each point was sampled for five minutes for each fifteen-minute test run.

2.0 SUMMARY OF RESULTS

**TABLE 2-1
 SUMMARY OF EU-COMPWEST RESULTS**

Test Parameters	Run 1	Run 2	Run 3	Average
Date	9/13/2022	9/13/2022	9/13/2022	
Start Time	9:53	10:15	10:38	
Stop Time	10:07	10:30	10:53	
Gas Conditions				
Oxygen (% dry)	14.6	14.5	14.2	14.4
Fuel Factor, Fd	8612	8612	8612	8612
Fuel Flow (MSCH)	28.6	28.6	29.1	28.8
Heating Value (BTU)	1061	1061	1061	1061
Heat Input (MMBTU/hr)	30.3	30.3	30.9	30.5
Nitrogen Oxides Results				
Concentration (ppmdv)	46.9	47.0	43.9	45.9
Concentration, C (ppmdv@15% O2)	43.9	43.1	38.4	41.8
Emission rate, E (lb/mmBTU)	0.160	0.157	0.140	0.152
Emission rate (lb/hr)	4.85	4.77	4.32	4.65
Carbon Monoxide Results				
Concentration (ppmdv)	4.11	3.90	3.82	3.94
Concentration, C (ppmdv@15% O2)	3.84	3.58	3.34	3.59
Emission rate, E (lb/mmBTU)	0.00852	0.00794	0.00741	0.00796
Emission Rate (lb/hr)	0.259	0.241	0.229	0.243

**TABLE 2-2
 EU-COMPWEST PROCESS DATA**

Run	RMP/BHP	% Load	Catalyst Pressure drop (in)	Catalyst inlet temperature (F)	Fuel Flow (MSCFH)	Fuel Consumed (MSCF)
1	937/3883	92	2.6	890	28.6	7.15
2	936/3887	92	2.6	889	28.6	7.15
3	936/3873	93	2.6	889	29.1	7.28

**TABLE 2-3
 SUMMARY OF EU-COMPEAST RESULTS**

Test Parameters	Run 1	Run 2	Run 3	Average
Date	9/13/2022	9/13/2022	9/13/2022	
Start Time	11:48	12:10	13:02	
Stop Time	12:03	12:25	13:17	
Gas Conditions				
Oxygen (% dry)	16.1	16.2	16.0	16.1
Fuel Factor, Fd	8614	8614	8614	8614
Fuel Flow (MSCFH)	27.6	27.6	27.6	27.6
Heating Value (BTU)	1062	1062	1063	1062
Heat Input (MMBTU/hr)	29.3	29.3	29.3	29.3
Nitrogen Oxides Results				
Concentration (ppmdv)	20.4	19.9	20.5	20.3
Concentration, C (ppmdv@15% O2)	25.2	25.1	24.8	25.1
Emission rate, E (lb/mmBTU)	0.0919	0.0915	0.0905	0.0913
Emission rate (lb/hr)	2.69	2.68	2.65	2.68
Carbon Monoxide Results				
Concentration (ppmdv)	1.66	1.77	1.84	1.76
Concentration, C (ppmdv@15% O2)	2.05	2.23	2.23	2.17
Emission rate, E (lb/mmBTU)	0.00455	0.00494	0.00495	0.00481
Emission Rate (lb/hr)	0.133	0.145	0.145	0.141

**TABLE 2-4
 EU-COMPEAST PROCESS DATA**

Run	RPM/BHP	% Load	Catalyst Pressure drop (in)	Catalyst inlet temperature (F)	Fuel Flow (MSCFH)	Fuel Consumed (MSCF)
1	939/3779	93	2.6	861	27.6	6.9
2	938/3774	94	2.6	861	27.6	6.9
3	939/3768	93	2.7	862	27.6	6.9

**TABLE 2-5
 SUMMARY OF EU-COMP NORTH RESULTS**

Test Parameters	Run 1	Run 2	Run 3	Average
Date	9/13/2022	9/13/2022	9/13/2022	
Start Time	14:58	15:25	15:48	
Stop Time	15:13	15:40	16:03	
Gas Conditions				
Oxygen (% dry)	8.6	8.6	8.7	8.7
Fuel Factor, Fd	8612	8612	8612	8612
Fuel Flow (MSCFH)	6.4	6.5	6.5	6.5
Heating Value (BTU)	1062	1062	1062	1062
Heat Input (MMBTU/hr)	6.8	6.9	6.8	6.8
Nitrogen Oxides Results				
Concentration (ppmdv)	88.0	91.6	80.8	86.8
Concentration, C (ppmdv@15% O2)	42.3	44.0	39.2	41.8
Emission rate, E (lb/mmBTU)	0.154	0.160	0.143	0.152
Emission rate (lb/hr)	1.06	1.11	0.985	1.05
Carbon Monoxide Results				
Concentration (ppmdv)	0.748	0.770	0.667	0.735
Concentration, C (ppmdv@15% O2)	0.360	0.370	0.333	0.354
Emission rate, E (lb/mmBTU)	0.000798	0.000821	0.000739	0.000786
Emission Rate (lb/hr)	0.00542	0.00566	0.005010	0.00539

**TABLE 2-6
 EU-COMP NORTH PROCESS DATA**

Run	RPM/BHP	% Load	Catalyst Pressure drop (in)	Catalyst inlet temperature (F)	Fuel Flow (MSCFH)	Fuel Consumed (MSCF)
1	1114/793	77	4.86	790	6.4	1.60
2	1114/800	78	4.93	789	6.5	1.63
3	1115/796	78	5.05	789	6.5	1.63

3.0 TEST PROCEDURES

3.1 METHOD LISTING

The following EPA test methods were referenced for the test program. These methods can be found in 40 CFR Part 60 Appendix A and 40 CFR Part 63, Appendix A.

- Method 3A Determination of Oxygen and Carbon Dioxide Concentrations in Emissions from Stationary Sources (Instrumental Analyzer Procedure)
- Method 7E Determination of nitrogen oxides emissions from stationary sources
- Method 10 Determination of carbon monoxide emissions from stationary sources
- Method 19 Determination of sulfur dioxide removal efficiency and particulate matter, sulfur dioxide, and nitrogen oxides emission rates

3.2 METHOD DESCRIPTIONS

3.2.1 Methods 3A, 7E and 10

The oxygen, nitrogen oxides and carbon monoxide concentrations at the test location were determined using EPA Methods 3A, 7E and 10. A schematic of the sample system is shown in Figure 1 in the Appendix.

The sample gas was withdrawn from the test location at a constant rate through an in-situ 0.3 micron stainless steel cintered frit, a stainless steel probe and Teflon sample line. The sample line was operated at a temperature of 250 °F to prevent the condensation of moisture. The sample gas passed through an M & C Type EC gas cooler system. The gas cooler is designed to unobtrusively lower the dewpoint of the sample gas to 35 °F, thus removing the moisture. The dry gas was then vented to the oxygen analyzer. Results from this analyzer were determined on a dry basis.

The analyzers that were used for this project are listed in the table below.

**TABLE 3-1
 ANALYZERS USED FOR PROJECT**

Parameter	Manufacturer	Model Number	Operating Principle	Units Reported	Ranges used
Oxygen	Servo	1440	Paramagnetic	(%)	0-21.2
Nitrogen Oxides	Thermo	42i	Chemiluminescence	ppmd	0-94.01
Carbon Monoxide	Thermo	48i	Infrared, Gas Filter Correlation	ppmd	0-92.21

Prior to sampling, a calibration error test was performed on the analyzer using EPA Protocol 1 gases. The zero and high-range calibration gases for each constituent was introduced directly into each analyzer. Each analyzer was then adjusted to the appropriate values. The mid-range

and low-range gases were introduced to each analyzer and the measured values were then recorded. The measured values for each calibration gas were compared to the calibration gas values and the differences were less than the method requirement of two percent of the span value.

A sample system bias check was performed, by introducing the zero and mid-range calibration gases into the sampling system at the base of the probe. The gas was drawn through the entire sampling system. The measured responses were compared to the calibration error test values to determine the bias in response due to the sampling system. In all cases, the sampling system bias was less than the method requirement of five percent of the span value. In addition, the system response time was determined by measuring the time required for each analyzer to reach 95 percent of its' high-range calibration gas value.

After each test run the instrument drift for the analyzer was determined by introducing the zero and mid-range calibration gases into the sampling system at the base of the probe. The gas was drawn through the entire sampling system. The measured responses were compared to the values from the previous test run to determine the analyzer drift. For all test runs, the analyzer drift was less than the method requirement of three percent of the span value.

3.2.2 Method 19

EPA Method 19 was used to calculate pollutant emission rates in terms of pounds per million Btu (lb/mmBtu). The calculation was based on the oxygen content of the sample gas and an appropriate F factor, which is the ratio of combustion gas volumes to heat inputs. For this project the F factor used was 8,614 dscf/mmBtu for natural gas.

RECEIVED
NOV 10 2022
AIR QUALITY DIVISION

4.0 DESCRIPTION OF INSTALLATION


EU-COMP NORTH is a 10.1 MMBtu/hr heat input Caterpillar G3516 natural gas fired 4-stroke lean burn reciprocating internal combustion engine driving a compressor. It is controlled with a catalytic oxidation system.

EU-COMPEAST is a 31.9 MMBtu/hr heat input Caterpillar G3616 natural gas fired 4-stroke lean burn reciprocating internal combustion engine driving a compressor. It is controlled with a catalytic oxidation system.

EU-COMP WEST is a 31.9 MMBtu/hr heat input Caterpillar G3616 natural gas fired 4-stroke lean burn reciprocating internal combustion engine driving a compressor. It is controlled with a catalytic oxidation system.

The CAT control system calculates load % using fuel flow, manifold pressure, combustion air flow and rpms.

APPENDIX A FIGURES

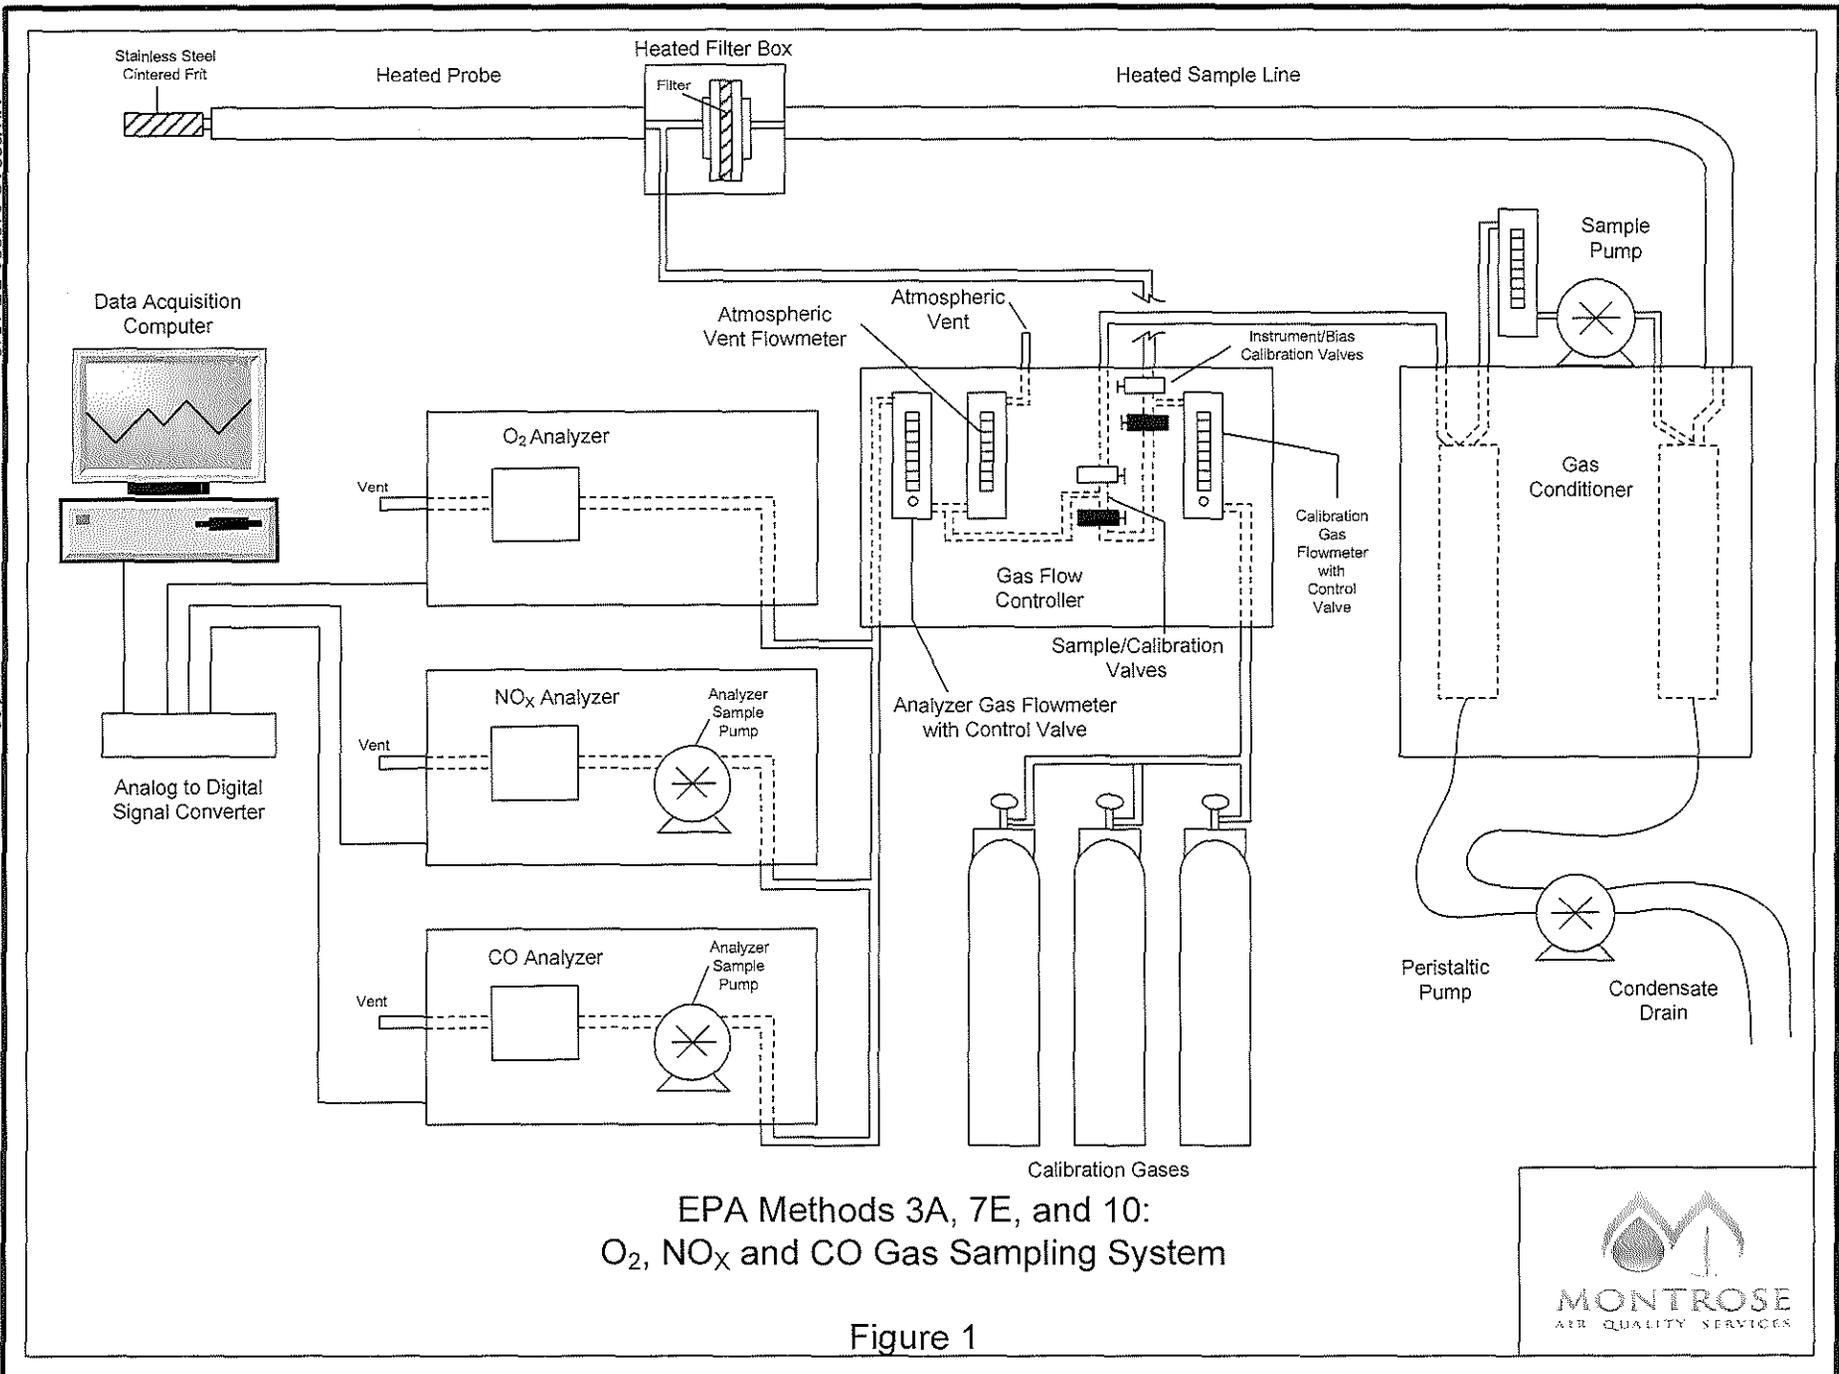

EPA Methods 3A, 7E, and 10:
O₂, NO_x and CO Gas Sampling System

Figure 1

