




AIR HYGIENE, INC.

# Testing Solutions for a Better World

STACK EMISSIONS STUDY  
EPA 40 CFR PART 63 SUBPART LLL  
FOR  
KILNS 20 AND 21  
PREPARED FOR  
HOLCIM (US) INC. D/B/A LAFARGE, SRN B1477  
AT THE  
ALPENA PLANT  
ALPENA, MICHIGAN  
MARCH 19, 2020

Permit No: MI-ROP-B1477-2012

Report Date: March 25, 2020



**Corporate Headquarters**  
1600 W Tacoma Street  
Broken Arrow, Oklahoma 74012



AIR HYGIENE, INC.

(918) 307-8865 or (888) 461-8778  
[www.airhygiene.com](http://www.airhygiene.com)

#### Remote Testing Offices

Las Vegas, NV 89156  
Ft. Worth, TX 76028  
Humble, TX 77338  
Shreveport, LA 71115  
Miami, FL 33101  
Pittsburgh, PA 15205




**STACK EMISSIONS STUDY  
EPA 40 CFR PART 63 SUBPART LLL  
FOR  
KILNS 20 AND 21  
PREPARED FOR  
HOLCIM (US) INC. D/B/A LAFARGE, SRN B1477  
AT THE  
ALPENA PLANT  
ALPENA, MICHIGAN  
MARCH 19, 2020**

Prepared and Reviewed by:



Thomas K. Graham, PE, QSTI  
Director of AHU



Logan Tsotsoros  
AHU Support Staff



I, Mars A. Sharief  
Mars A. Sharief, QSTI  
Sr. Regional Manager-Chicago, IL  
certify that this testing was conducted and  
this report was created in conformance  
with the requirements of ASTM D7036

*(this page intentionally left blank)*

## Table of Contents

<b>1.0</b>	<b>INTRODUCTION</b>	<b>1</b>
<b>1.1</b>	<b>TEST PURPOSE AND OBJECTIVES</b>	<b>1</b>
<b>1.2</b>	<b>SUMMARY OF TEST PROGRAM</b>	<b>1</b>
1.2.1	Participating Organizations	1
1.2.2	Industry	1
1.2.3	Air Permit and Federal Requirements	1
1.2.4	Plant Location	1
1.2.5	Equipment Tested	1
1.2.6	Emission Points	1
1.2.7	Emission Parameters Measured	2
1.2.8	Date of Emission Test	2
1.2.9	Federal Certifications	2
<b>1.3</b>	<b>KEY PERSONNEL</b>	<b>2</b>
<b>2.0</b>	<b>SUMMARY OF TEST RESULTS</b>	<b>2</b>
<b>3.0</b>	<b>SOURCE OPERATION</b>	<b>3</b>
<b>3.1</b>	<b>PROCESS DESCRIPTION</b>	<b>3</b>
<b>3.2</b>	<b>SAMPLING LOCATION</b>	<b>4</b>
<b>4.0</b>	<b>SAMPLING AND ANALYTICAL PROCEDURES</b>	<b>4</b>
<b>4.1</b>	<b>TEST METHODS</b>	<b>4</b>
<b>4.2</b>	<b>INSTRUMENT CONFIGURATION AND OPERATIONS FOR GAS ANALYSIS</b>	<b>5</b>

## APPENDICES

Appendix A	Test Results and Calculations
Appendix B	Emission Data Records
Appendix C	Calibration Gas Certifications
Appendix D	Quality Assurance and Quality Control Data
Appendix E	Equipment Calibration Records

**Stack Emissions Study  
Kilns 20 and 21  
Holcim (US) Inc. d/b/a Lafarge, SRN B1477  
Alpena Plant  
Alpena, Michigan  
March 19, 2020**

## **1.0 INTRODUCTION**

Air Hygiene International, Inc. (Air Hygiene) has completed the Stack Emissions Study for particulate matter (PM) from the exhaust of Kilns 20 and 21 for Holcim (US) Inc. d/b/a Lafarge, SRN B1477 at the Alpena Plant in Alpena, Michigan. This report details the background, results, process description, and the sampling/analysis methodology of the stack sampling survey conducted on March 19, 2020.

## **1.1 TEST PURPOSE AND OBJECTIVES**

The purpose of the test was to conduct a periodic compliance emission test to document levels of selected pollutants. The information will be used to confirm compliance with 40 Code of Federal Regulations (CFR) 60, Subpart LLL and the operating permit issued by the Michigan Department of Environment, Great Lakes, and Energy (EGLE). The specific objective was to determine the emission concentration of PM from the exhaust of Holcim (US) Inc. d/b/a Lafarge, SRN B1477's Kilns 20 and 21.

## **1.2 SUMMARY OF TEST PROGRAM**

The following list details pertinent information related to this specific project:

- 1.2.1 Participating Organizations
  - Michigan Department of Environment, Great Lakes, and Energy (EGLE)
  - Holcim (US) Inc. d/b/a Lafarge, SRN B1477
  - Air Hygiene
- 1.2.2 Industry
  - Cement
- 1.2.3 Air Permit and Federal Requirements
  - Permit Number: MI-ROP-B1477-2012
  - 40 CFR 63, Subpart LLL
- 1.2.4 Plant Location
  - Alpena Plant in Alpena, Michigan
    - GPS Coordinates [Latitude 45.07095, Longitude -83.41489]
    - 1435 Ford Avenue, Alpena, Michigan 49707
    - Federal Registry System / Facility Registry Service (FRS) No. – 110015742605
    - Source Classification Codes (SCC) – 30501120, 30500699, and 30500613
- 1.2.5 Equipment Tested
  - Kilns 20 and 21
- 1.2.6 Emission Points
  - Exhaust from Kilns 20 and 21
  - For all molecular weight gases, a single sample point in the exhaust stack
  - For all wet chemistry testing, 27 or 25 sampling points in the exhaust stack from each unit

- 1.2.7 Emission Parameters Measured
  - PM
  - H<sub>2</sub>O
  - Flow
  - CO<sub>2</sub>
  - O<sub>2</sub>
- 1.2.8 Date of Emission Test
  - March 19, 2020
- 1.2.9 Federal Certifications
  - Stack Testing Accreditation Council AETB Certificate No. 3796.02
  - International Standard ISO/IEC 17025:2005 Certificate No. 3796.01

### 1.3 KEY PERSONNEL

Holcim (US) Inc. d/b/a Lafarge, SRN B1477:	Travis Weide (travis.weide@lafargeholcim.com)	989-358-3321
EGLE:	Kurt Childs	231-878-2045
Air Hygiene:	Mars Sharief (msharief@airhygiene.com)	918-307-8865
Air Hygiene:	Atlas Melchert	918-307-8865
Air Hygiene:	Adrian Lopez	918-307-8865

### 2.0 SUMMARY OF TEST RESULTS

Results from the sampling conducted on Holcim (US) Inc. d/b/a Lafarge, SRN B1477's Kilns 20 and 21 located at the Alpena Plant on March 19, 2020 are summarized in the following tables and relate only to the items tested.

The results of all measured pollutant emissions were below the required limits. All testing was performed without any real or apparent errors.

**TABLE 2.1  
CEMENT KILN 20 PM EMISSIONS SUMMARY**

Historical Data	K20-PM-1	K20-PM-2	K20-PM-3	Average	Units	Limits
Run Start Time	13:17	14:30	15:48		hh:mm	
Run Stop Time	14:20	15:34	16:53		hh:mm	
Test Date	03/19/20	03/19/20	03/19/20		mm/dd/yy	
Production Rate	43.80	48.74	46.24	46.26	ton/hr	--
Emission Rate Data	K20-PM-1	K20-PM-2	K20-PM-3	Average	Units	Limits
Filterable PM Mass	8.62	8.49	11.09	9.40	mg	--
Filterable PM Emission Rate	2.48	2.34	3.16	2.66	lb/hr	--
	0.057	0.048	0.068	0.058	lb/ton	0.07

**TABLE 2.2  
CEMENT KILN 21 PM EMISSIONS SUMMARY**

<b>Historical Data</b>	<b>K21-PM-1</b>	<b>K21-PM-2</b>	<b>K21-PM-3</b>	<b>Average</b>	<b>Units</b>	<b>Limits</b>
Run Start Time	06:55	08:28	09:50		hh:mm	
Run Stop Time	08:06	09:34	10:57		hh:mm	
Test Date	03/19/20	03/19/20	03/19/20		mm/dd/yy	
Production Rate	54.02	54.80	55.07	54.63	ton/hr	--
<b>Emission Rate Data</b>	<b>K21-PM-1</b>	<b>K21-PM-2</b>	<b>K21-PM-3</b>	<b>Average</b>	<b>Units</b>	<b>Limits</b>
Filterable PM Mass	10.36	7.77	13.11	10.42	mg	--
Filterable PM Emission Rate	2.99	2.11	3.88	2.99	lb/hr	--
	0.055	0.039	0.070	0.055	lb/ton	0.07

**TABLE 2.3  
PM-CPMS SUMMARY RESULTS**

<b>Unit</b>	<b>PM Emissions lb/tons clinker</b>	<b>PM Limit lb/ton clinker</b>	<b>PM-CPMS mA</b>	<b>Operating Limit mA</b>
Cement Kiln 20	0.06	0.07	4.16	4.16
Cement Kiln 21	0.05	0.07	4.21	4.21

Table 2.2 represents the PM-CPMS Operating limits. The source must comply with PC MACT Regulation 40 CFR 63, Subpart LLL. The PM-CPMS Operating Limit was calculated using the equations:

$$O_h = 1/n \sum x_i$$

Where,

$O_h$  = Site specific operating limit, in milliamps (mA)

n = Number of data points

$X_i$  = PM CPMS data points for all runs i, mA

### **3.0 SOURCE OPERATION**

#### **3.1 PROCESS DESCRIPTION**

The Alpena Plant is located in Alpena, Michigan. The Raw Mill System mixes and grinds the raw materials (limestone, sand, bauxite, Bell shale, gypsum) and alternate raw materials (slag, iron ore, fly ash, and CKD) then sends the materials to the kilns.

Holcim (US) Inc. d/b/a Lafarge, SRN B1477 operates five rotary kilns, which manufacture Portland cement clinker using the dry process. A mixture of pulverized bituminous coal and petroleum coke, with a heating value of approximately 11,750 Btu per pound, serves as the primary fuel fed to the kilns. Coal and coke are fed to a Raymond bowl mill and ground to a fineness of approximately 95% passing a 200-mesh sieve.

laf-20-alpena.mi-comp#3-Kiln20&21PM-rpt

## **Kiln Group 5:**

Kiln Group 5 at the Alpena Plant consists of three rotary kilns (#19, #20, and #21). Specific components of Kiln Group 5 are:

- Coal/petroleum coke and combustion air delivery;
- Raw mix preparation and delivery;
- Three rotary kilns;
- Kiln burners; and
- Air pollution control system, consisting of the following components:
  - Boiler;
  - Multiclone dust collectors;
  - Baghouses;
  - SNCR;
  - Induced draft (ID) fans; and
  - Exhaust stacks.

Allis Chalmers manufactured all kilns identified as #19, #20, and #21. Each kiln is 460.5 feet long. Each kiln shell has an inside diameter of 15 feet at the feed end and 13 feet at the firing end. The kilns in Kiln Group 5 rotate at speeds of greater than 40 revolutions per hour and are driven by an electric motor.

Dracco manufactured the baghouse for Kiln 19. The baghouse has two parallel sets of six chambers with a designed airflow of 175,000 cubic feet per minute (cfm) at 400°F. The maximum operating temperature is 550°F. The baghouses for kilns 20 and 21, manufactured by Wheelabrator-Frye are identical in design and construction, with two parallel sets of six chambers. Each baghouse has a designed air flow of 166,000 cfm at 400°F. The maximum operating temperature is 550°F.

## **3.2 SAMPLING LOCATION**

The baghouse breaching ducts have been demonstrated as acceptable locations to conduct EPA reference method testing on all kilns. For each location the stack sampling occurs at the breaching duct between each kiln's baghouse and discharge stack. Ductwork geometry is adequate for collecting a representative sample of gaseous constituents at this point. Further descriptions of all sampling locations for this test program are provided in Appendix B.

## **4.0 SAMPLING AND ANALYTICAL PROCEDURES**

### **4.1 TEST METHODS**

The emission test on Kilns 20 and 21 at the Alpena Plant was performed following United States Environmental Protection Agency (EPA) methods described by the Code of Federal Regulations (CFR). Table 4.1 outlines the specific methods performed on March 19, 2020.

**TABLE 4.1  
SUMMARY OF SAMPLING METHODS**

Pollutant or Parameter	Sampling Method	Analysis Method
Sample Point Location	EPA Method 1	Equal Area Method
Stack Flow Rate	EPA Method 2	S-Type Pitot Tube
Oxygen	EPA Method 3A	Paramagnetic Cell
Carbon Dioxide	EPA Method 3A	Nondispersive Infrared Analyzer
Stack Moisture Content	EPA Method 4	Gravimetric Analysis
Particulate Matter	EPA Method 5	Front Half Filterables

#### **4.2 INSTRUMENT CONFIGURATION AND OPERATIONS FOR GAS ANALYSIS**

The sampling and analysis procedures used during these tests conform with the methods outlined in the Code of Federal Regulations (CFR), Title 40, Part 60, Appendix A, Methods 1, 2, 3A, 4, and 5.

Figure 4.1 depicts the sample system used for the real-time gas analyzer tests. The gas sample was continuously pulled through the probe and transported, via heat-traced Teflon® tubing, to a stainless-steel minimum-contact condenser designed to dry the sample. Transportation of the sample, through Teflon® tubing, continued into the sample manifold within the mobile laboratory via a stainless steel/Teflon® diaphragm pump. From the manifold, the sample was partitioned to the real-time analyzers through rotameters that controlled the flow rate of the sample.

Figure 4.1 shows that the sample system was also equipped with a separate path through which a calibration gas could be delivered to the probe and back through the entire sampling system. This allowed for convenient performance of system bias checks as required by the testing methods.

All instruments were housed in a climate controlled, trailer-mounted mobile laboratory. Gaseous calibration standards were provided in aluminum cylinders with the concentrations certified by the vendor. EPA Protocol No. 1 was used to determine the cylinder concentrations where applicable (i.e. NO<sub>x</sub> calibration gases).

Table 4.2 provides a description of the analyzers used for the instrument portion of the tests. All data from the continuous monitoring instruments were recorded on a Logic Beach Portable Data Logging System which retrieves calibrated electronic data from each instrument every one second and reports an average of the collected data every 30 seconds.


Figure 4.2 represents the sample system used for the wet chemistry tests (PM). A heated stainless-steel probe with a glass liner and nozzle was inserted into the sample ports of the stack to extract gas measurements from the emission stream through a filter and glass impinger train. Flow rates are monitored with oil filled manometers and total sample volumes are measured with a dry gas meter.

The stack gas analysis for O<sub>2</sub> and CO<sub>2</sub> concentrations was performed in accordance with procedures set forth in EPA Method 3A. The O<sub>2</sub> analyzer uses a paramagnetic cell detector and the CO<sub>2</sub> analyzer uses a continuous nondispersive infrared analyzer.


**TABLE 4.2  
ANALYTICAL INSTRUMENTATION**

<b>Parameter</b>	<b>Manufacturer and Model</b>	<b>Range</b>	<b>Sensitivity</b>	<b>Detection Principle</b>
CO <sub>2</sub>	SERVOMEX 1440	0-20%	0.1%	Nondispersive infrared
O <sub>2</sub>	SERVOMEX 1440	0-25%	0.1%	Paramagnetic cell, inherently linear.



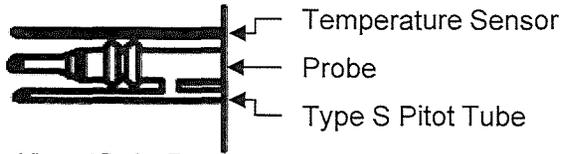

View of Probe End  
(from the bottom)



Wet Chemistry Assembly  
(photo)

Page 8 of 108

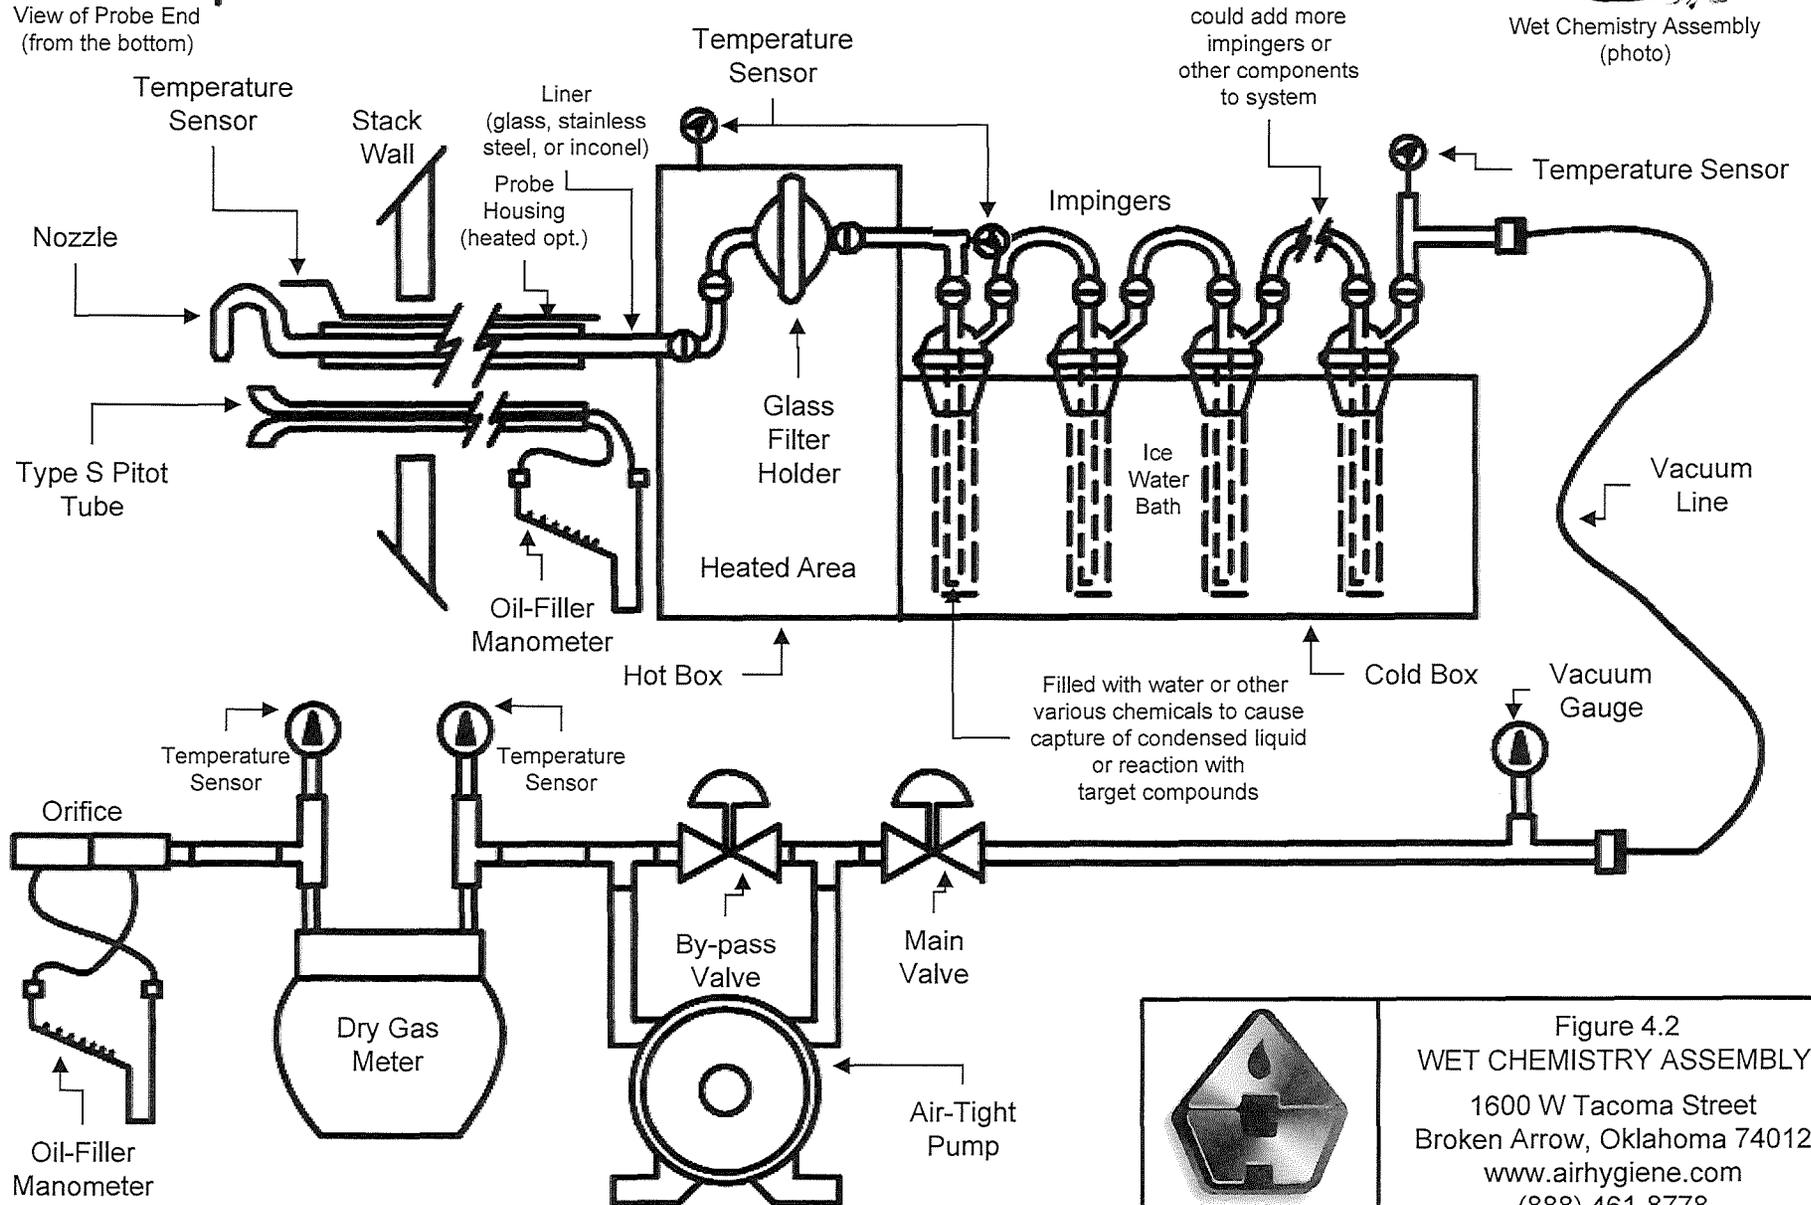


Figure 4.2  
WET CHEMISTRY ASSEMBLY  
1600 W Tacoma Street  
Broken Arrow, Oklahoma 74012  
www.airhygiene.com  
(888) 461-8778

**APPENDIX A**  
**TEST RESULTS AND CALCULATIONS**