

COMPLIANCE TEST REPORT

for

QUARTERLY HYDROGEN CHLORIDE (HCL) EMISSIONS

EU-BOILER7-SC (Unit 7)

SRN: B2796

3rd Quarter 2019

**St. Clair Power Plant
East China, Michigan**

July 31, 2019

**Prepared By:
Environmental Management & Resources
Environmental Field Services Group
DTE Corporate Services, LLC
7940 Livernois H-136
Detroit, MI 48210**

DTE

DTE

CONTENTS

<u>Section</u>	<u>Page</u>
EXECUTIVE SUMMARY.....	III
1.0 INTRODUCTION.....	1
2.0 SOURCE DESCRIPTION.....	1
3.0 SAMPLING AND ANALYTICAL PROCEDURES.....	2
3.1 OXYGEN AND CARBON DIOXIDE (USEPA METHOD 3A).....	3
3.1.1 Sampling Method.....	3
3.1.2 O ₂ / CO ₂ Sampling Train.....	3
3.1.3 Sampling Train Calibration.....	3
3.2 MOISTURE DETERMINATION (USEPA METHOD 4).....	3
3.2.1 Sampling Method.....	3
3.3 HYDROGEN CHLORIDE (USEPA METHOD 26A).....	3
3.3.1 HCl Sampling Method.....	3
3.3.2 Quality Control and Assurance.....	4
3.3.3 Data Reduction.....	4
4.0 OPERATING PARAMETERS.....	5
5.0 DISCUSSION OF RESULTS.....	5
6.0 CERTIFICATION STATEMENT.....	6

RESULTS TABLES

Table No. 1: HCl Emission Testing Summary – EU-BOILER7-SC

FIGURES

- 1 Sampling Location – EU-BOILER7-SC
- 2 USEPA Method 26A Sampling Train

APPENDICES

- A Test Plan and Acceptance Letter
- B Field Sampling Data
- C Process Operational Data
- D Example Calculations
- E Analytical Data
- F Calibration Data



EXECUTIVE SUMMARY

DTE Energy's Environmental Management and Resources (EM&R) Field Services Group performed the 3rd Quarter – 2019 Hydrogen Chloride (HCl) emissions test on the exhaust of EU-BOILER7-SC at the St. Clair Power Plant, located in East China, Michigan. The testing was required by the 40 CFR Part 63, Subpart UUUUU (Mercury and Air Toxics Standards - MATS) to document quarterly HCl stack emissions. The testing was conducted on July 31, 2019.

A summary of the emission test results is shown below:

**Emissions Testing Summary
St. Clair Power Plant
EU-BOILER7-SC**

Source	Date	Load (GMW)	HCl (lbs/MmBtu) ⁽¹⁾
EU-BOILER7-SC	7-31-19	281.0	0.0003

(1) MATS Limit 0.002 lbs/MMBtu



1.0 INTRODUCTION

DTE Energy's Environmental Management and Resources (EM&R) Field Services Group performed the 3rd Quarter – 2019 Hydrogen Chloride (HCl) emissions test on the exhaust of EU-BOILER7-SC at the St. Clair Power Plant, located in East China, Michigan. The testing was required by the 40 CFR Part 63, Subpart UUUUU (Mercury and Air Toxics Standards - MATS) to document quarterly HCl stack emissions. The testing was conducted on July 31, 2019.

Testing was performed pursuant to USEPA Method 26A (Modified).

The fieldwork was performed in accordance with EPA Reference Methods and DTE Energy Intent to Test¹. Emissions testing was performed utilizing Method 26A (modified as a single point sample) due equipment availability limitations which did not allow for FTIR analysis. The following DTE Energy personnel participated in the testing program: Mr. Mark Grigereit, Principal Engineer Mr. Thom Snyder, Environmental Specialist, and Mr. Fred Meinecke, Senior Environmental Technician. Mr. Snyder was the project leader. Mr. Rommy Sleiman, Environmental Engineer at the plant provided process coordination for the testing program.

2.0 SOURCE DESCRIPTION

The St Clair Power Plant (SCPP) located at 4901 Pointe Drive in East China, Michigan, employs the use of five (5) coal-fired boilers (Units 1-3, 6, and 7). Units 1-3 each have Babcock and Wilcox boilers capable of producing 1,070,000 pounds per hour of steam. Unit 1 is equipped with a General Electric turbine generator nominally rated capability of 167 megawatts (MW). Units 2 and 3 have Allis Chalmers turbine generators each with a nominally rated capability of 170 MW. Full load capability for Units 1-3, while firing coal only, are 135 MW and 150 MW while over-firing with oil.

Units 6 and 7 have Combustion Engineering boilers capable of producing 2,100,000 and 3,580,000 pounds of steam per hour respectively. The turbine generators on each unit were manufactured by Westinghouse and have a nominally rated capability of 325 and 500 megawatts respectively. Full load capability for Units 6 and 7 while firing coal only is approximately 315 MW and 470 MW respectively.

The air pollution control equipment on Units 1-3 consists of Wheelabrator Frye electrostatic precipitators on each unit that have design collection efficiencies of 99.6%.

¹ EGLE, Test Plan, Submitted October 23, 2017. (Attached-Appendix A)

DTE

Each exhaust stack is 599 feet tall with an internal diameter of 13.3 feet. The air pollution control equipment on Unit 6 consists of Research Corporation electrostatic precipitators that have design collection efficiencies of 99.6%. The exhaust stack is 425 feet tall with an internal diameter of 19.0 feet. The air pollution control equipment on EU-BOILER7-SC consists of an American Standard electrostatic precipitator that has design collection efficiency of 99.6%. The exhaust stack is 600 feet tall with an internal diameter of 16.0 feet

Each boiler is equipped with a Dry Sorbent Injection (DSI) and Activated Carbon Injection (ACI) air quality control system. The DSI system is used to control acid gas, PM, PM₁₀, PM_{2.5}, and NO_x emissions from each unit. Trona is received at the plant where inline mills further refine the Trona. The ACI system is used to control Mercury emissions from each unit.

Testing was performed on EU-BOILER7-SC while operating at normal load conditions, per Subpart UUUUU.

3.0 SAMPLING AND ANALYTICAL PROCEDURES

DTE Energy obtained emissions measurements in accordance with procedures specified in the USEPA *Standards of Performance for New Stationary Sources* or listed as an approved "Other Test Method". The sampling and analytical methods used in the testing program are indicated in the table below:

Sampling Method	Parameter	Analysis
USEPA Method 3A	Oxygen & CO ₂	Instrumental Analyzer Method
USEPA Method 4	Moisture Content	Field data analysis and reduction
USEPA Method 26a	Hydrogen Chloride	Ion Chromatography
USEPA Method 19	Emission Rate Calculations	Stoichiometric Calculations

DTE

3.1 OXYGEN AND CARBON DIOXIDE (USEPA Method 3A)

3.1.1 Sampling Method

Stack gas oxygen (O₂) and carbon dioxide (CO₂) emissions were evaluated using USEPA Method 3A, "Gas Analysis for Carbon Dioxide, Oxygen, Excess Air, and Dry Molecular Weight (Instrumental Analyzer Method)". The O₂ / CO₂ analyzers utilize paramagnetic sensors.

3.1.2 O₂/CO₂ Sampling Train

The Method 3A sampling system consisted of continuously collecting a gas sample from the exhaust of the Method 5 sampling system. The samples were drawn through a PTFE line into a Servomex™ O₂/CO₂ gas analyzer.

3.1.3 Sampling Train Calibration

The O₂ / CO₂ analyzer was calibrated per procedures outlined in USEPA Method 7E. Zero, span, and mid-range calibration gases were introduced directly into the analyzer to verify the instruments linearity. The O₂/CO₂ concentrations are recorded on the field data sheets.

3.2 MOISTURE DETERMINATION (USEPA Method 4)

3.2.1 Sampling Method

Determination of the moisture content of the exhaust gas was performed using the method described in USEPA Method 4, "Determination of Moisture Content in Stack Gases". The exhaust gas condensate was collected in glass impingers and the percentage of moisture was derived from calculations outlined in USEPA Method 4.

3.3 HYDROGEN CHLORIDE (USEPA Method 26A)

3.3.1 HCl Sampling Method

USEPA Method 26A, "Determination of Hydrogen Halide and Halogen Emissions" (Method 26A) was used to measure the Hydrochloric Acid (HCl) emissions (see Figure 2 for a schematic of the sampling train). Method 26A uses impingers containing 0.1N H₂SO₄ to capture the HCl. Triplicate, 60-minute test runs were conducted. The Method 26A sampling was performed as a single point sample per Method 26 procedures.

The Method 26A stack sampling system (Figure 2) consisted of the following:

- (1) Heated glass-lined probe (Maintained >250 °F)

DTE

- (2) Heated 3" glass filter holder with a PTFE filter (maintained at a temperature of >250 °F)
- (3) Set of impingers for the collection HCl and condensate for moisture determination (Impingers containing 0.1N H₂SO₄)
- (4) Length of sample line
- (5) Environmental Supply® control case equipped with a pump, dry gas meter, and calibrated orifice.

All sampling was conducted at a single point per Method 26.

After completion of each run, a leak test was conducted. All the impingers were measured for moisture gain. Impingers 1, 2 and 3 were rinsed with water and their contents and associated rinses were collected in a pre-cleaned sample container. The containers were labeled with the test number, test location, test date, and the level of liquid marked on the outside of the container. Immediately after recovery, the sample containers were placed in a cooler for storage.

Collected field blanks consisted of a 0.1N H₂SO₄ solution blank. 200ml of 0.1N H₂SO₄ was collected and diluted with DI water, from the same bottle used in sample recovery, to the liquid level of the three test runs. The blank was collected and analyzed following the same procedures used to recover and analyze the field samples.

Analysis of the Method 26A samples and blanks were conducted by Maxxaam Analytics. All analysis followed the procedures listed in USEPA Method 26A. A complete laboratory report is in Appendix E.

Field data sheets for the Method 26A sampling are in Appendix B.

3.3.2 Quality Control and Assurance

All sampling and analytical equipment was calibrated per the guidelines referenced in EPA Method 5 and 26A.

3.3.3 Data Reduction

The HCl emissions data collected during the testing were calculated and reported as parts per million (ppm) and pounds per million Btu (lb/MMBtu).

Analysis of the Method 26A samples and blanks were conducted by Maxxaam Analytics. All analysis followed the procedures listed in USEPA Method 26A. A complete laboratory report is in Appendix E.

Field data sheets for the Method 26A sampling are in Appendix B.

DTE

4.0 OPERATING PARAMETERS

The test program included the collection of boiler load and stack emissions CEMs data during each test run. Parameters recorded included gross Megawatts (GMW) and CEMs data (SO₂, NO_x, CO₂, and opacity). Additionally, dry sorbent injection rates (DSI) and activated carbon injection rates (ACI), in pounds per hour (lb/hr), are reported. Operational Data collected during the testing is presented in Appendix C.

During each day of emissions sampling, a representative coal sample was collected from the unit and analyzed for ultimate and proximate analysis, including % Sulfur, % Ash, and heat content. The results of the coal analysis were used to calculate an Fc value for each day of testing and used in the lb/MMBtu calculations. Results of the fuel analysis can be referred to in Appendix E.

5.0 DISCUSSION OF RESULTS

Table 1 presents the HCl emission testing results from EU-BOILER7-SC. HCl emissions are presented in parts per million on a wet basis (ppm_w) and pounds per million BTU (lbs/MMBtu). The EU-BOILER7-SC HCl emissions during the testing demonstrated an average concentration for HCl of 0.21 ppm. The average EU-BOILER7-SC HCl emissions were below the Subpart UUUUU limit of 0.0003 lb/MMBtu.

The auxiliary test data presented in the results table for each test includes the unit load in gross megawatts (GMW), DSI injection rate (lb/hr), ACI injection rate (lb/hr), and CO₂ concentration (%_{wet}).




6.0 CERTIFICATION STATEMENT


"I certify that I believe the information provided in this document is true, accurate, and complete. Results of testing are based on the good faith application of sound professional judgment, using techniques, factors, or standards approved by the Local, State, or Federal Governing body, or generally accepted in the trade."



Mr. Mark Grigereit, QSTI

This report prepared by: 

Mr. Mark Grigereit, QSTI
Principal Engineer, Field Services Group
Environmental Management and Resources
DTE Energy Corporate Services, LLC

This report reviewed by: 

Mr. Thomas Snyder, QSTI
Environmental Specialist, Field Services Group
Environmental Management and Resources
DTE Energy Corporate Services, LLC

DTE

RESULTS TABLE



TABLE NO. 1
HYDROGEN CHLORIDE EMISSIONS TESTING RESULTS
St. Clair Power Plant - EU-BOILER7-SC (Unit 7)
July 31, 2019

Test	Test Date	Test Time (DAHS Time)	Unit Load (GMW)	DSI Injection Rate (lb/hr)	ACI Injection Rate (lb/hr)	CO ₂ Concentration (%)	HCl Concentration (ppmv)	HCl Emissions (lbs/MMBtu) ⁽¹⁾
HCl-1	31-Jul-19	7:06-8:06	280.9	0	143	12.5	0.21	0.0003
HCl-2		8:19-9:19	281.0	0	111	12.5	0.21	0.0003
HCl-3		9:30-10:30	281.0	0	90	12.5	0.23	0.0003
		<i>Average:</i>	<i>281.0</i>	<i>0</i>	<i>115</i>	<i>12.5</i>	<i>0.22</i>	<i>0.0003</i>

(1) MATS Limit = 0.002 lb/MMBtu

DTE

FIGURES

Figure 1 – Sampling Location
 St. Clair Power Plant – EU-BOILER7-SC (Unit 7)
 July 31, 2019

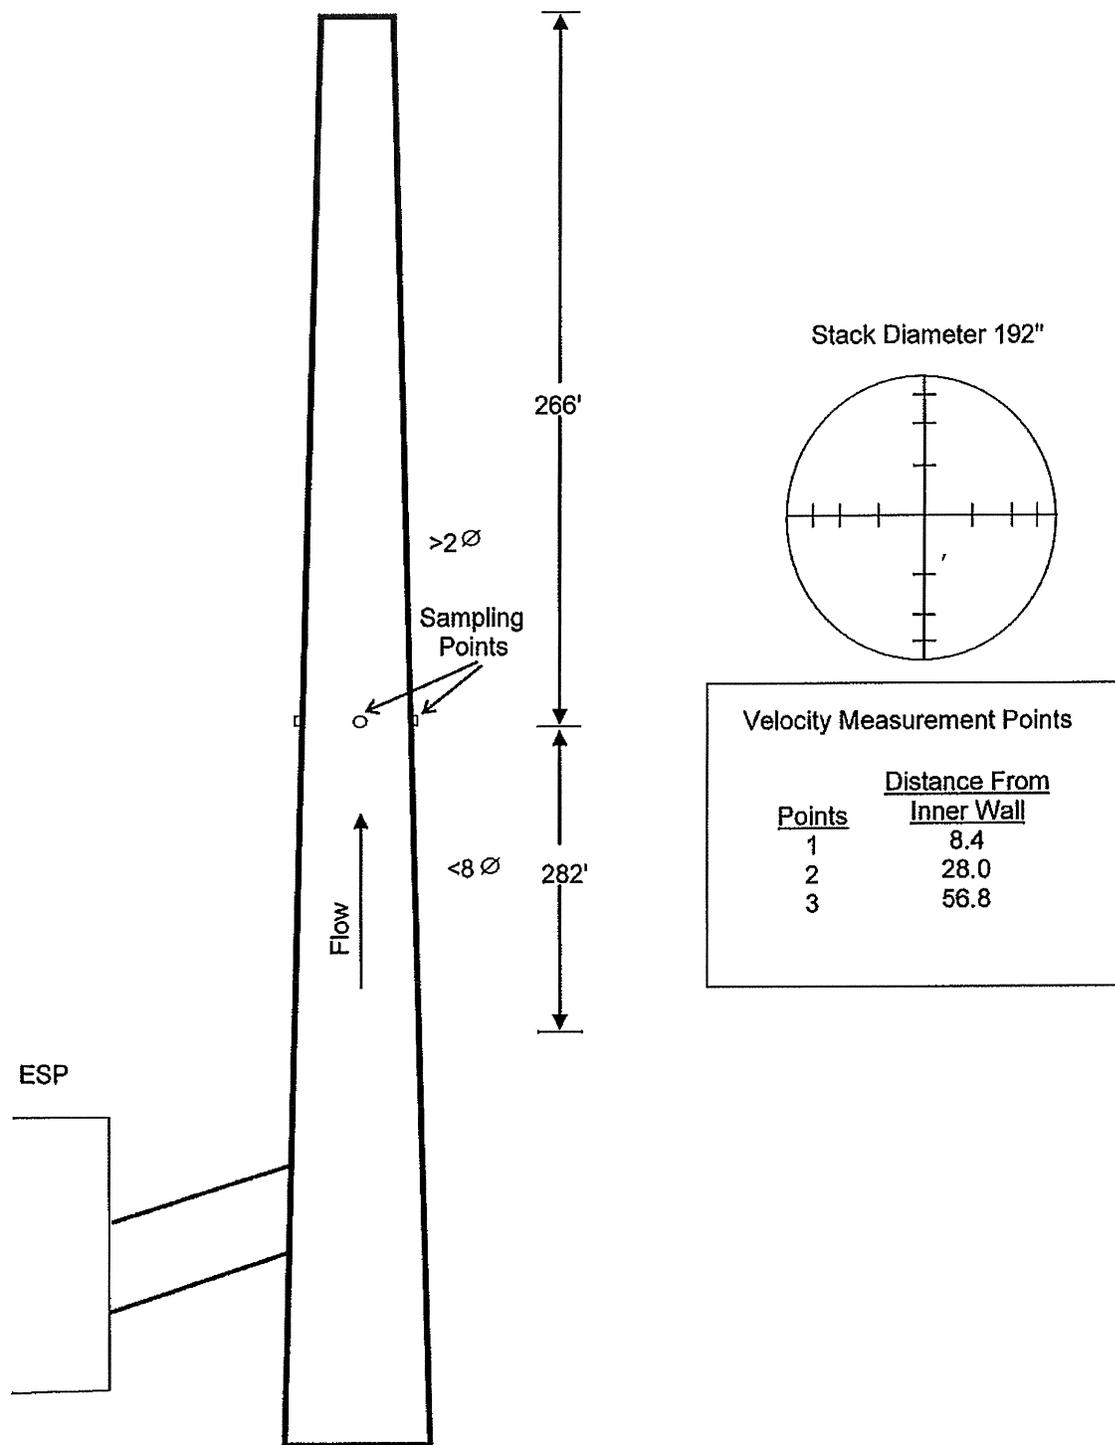


Figure 2 – USEPA Method 26A (Modified)
St.Clair Power Plant
July 31, 2019

