
# MICHIGAN DEPARTMENT OF ENVIRONMENTAL QUALITY AIR QUALITY DIVISION

April 4, 2006

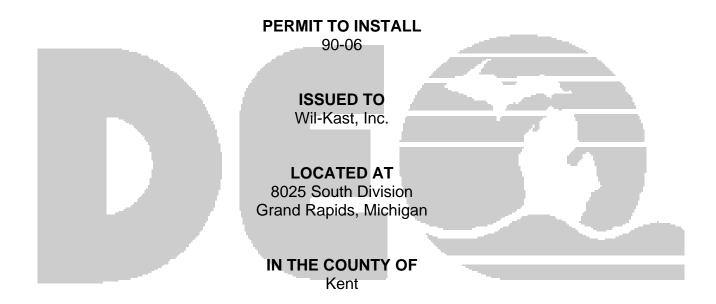

### STATE REGISTRATION NUMBER N7534

The Air Quality Division has approved this Permit to Install, pursuant to the delegation of authority from the Michigan Department of Environmental Quality. This permit is hereby issued in accordance with and subject to Section 5505(1) of Article II, Chapter I, Part 55, Air Pollution Control, of the Natural Resources and Environmental Protection Act, 1994 PA 451, as amended. Pursuant to Air Pollution Control Rule 336.1201(1), this permit constitutes the permittee's authority to install the identified emission unit(s) in accordance with all administrative rules of the Department and the attached conditions. Operation of the emission unit(s) identified in this Permit to Install is allowed pursuant to Rule 336.1201(6).

| March 23, 2006       | REQUIRED BY RULE 203: |
|----------------------|-----------------------|
| April 4, 2006        | SIGNATURE:            |
| DATE PERMIT VOIDED:  | SIGNATURE:            |
| DATE PERMIT REVOKED: | SIGNATURE:            |

## PERMIT TO INSTALL

## **Table of Contents**

| Section   | Page |
|---|------|
| Alphabetical Listing of Common Abbreviations / Acronyms | 2    |
| General Conditions                                      | 3    |
| Emission Unit Identification                            | 5    |
| Emission Unit Special Conditions                        | 5    |

Wil-Kast, Inc.
Permit No. 90-06

April 4, 2006
Page 2 of 5

#### **Common Abbreviations / Acronyms**

| Common Abbreviations / Acronyms  Pollytont/Magazanamant Abbreviations |  |                                     |  |  |
|---|--|-------------------------------------|--|--|
| Common Acronyms   |  | Pollutant/Measurement Abbreviations |  |  |
| AQD   | Air Quality Division   | Btu                                 | British Thermal Unit                             |  |
| ANSI  | American National Standards Institute                          | °C<br>CO                            | Degrees Celsius                                  |  |
|   | BACT Best Available Control Technology                         |                                     | Carbon Monoxide                                  |  |
|   | CAA Clean Air Act  |                                     | Dry standard cubic foot                          |  |
| CEM   | S  |                                     | Dry standard cubic meter                         |  |
| CFR   | Code of Federal Regulations                                    | °F                                  | Degrees Fahrenheit                               |  |
| COM   | Continuous Opacity Monitoring                                  | gr Grains                           |  |  |
| EPA   | Environmental Protection Agency                                | Hg Mercury                          |  |  |
| EU  | Emission Unit  | hr                                  | Hour   |  |
| FG  | Flexible Group   | $H_2S$                              | Hydrogen Sulfide                                 |  |
| GACS  | Gallon of Applied Coating Solids                               | hp                                  | Horsepower                                       |  |
| GC  | General Condition  | lb                                  | Pound  |  |
| HAP   | Hazardous Air Pollutant  | m                                   | Meter  |  |
| HVLP  | P High Volume Low Pressure *                                   |                                     | Milligram  |  |
| ID  | Identification   | mm                                  | n Millimeter                                     |  |
| LAER  | Lowest Achievable Emission Rate                                | MM                                  | Million  |  |
| MACT  | Maximum Achievable Control Technology                          | MW                                  | Megawatts  |  |
| MAERS   | Michigan Air Emissions Reporting System                        | ng                                  | Nanogram   |  |
| MAP   | Malfunction Abatement Plan                                     | NOx                                 | Oxides of Nitrogen                               |  |
| MDEQ  | EQ Michigan Department of Environmental Quality                |                                     | Particulate Matter                               |  |
| MIOSHA Michigan Occupational Safety & Health Administration           |  | PM-10                               | Particulate Matter less than 10 microns diameter |  |
| MSDS  |  |                                     | Pound per hour                                   |  |
| NESHAP  | NESHAP National Emission Standard for Hazardous Air Pollutants |                                     | Parts per million                                |  |
| NSPS  | New Source Performance Standards                               | ppmv                                | Parts per million by volume                      |  |
| NSR   | New Source Review  | ppmw                                | Parts per million by weight                      |  |
| PS  | Performance Specification                                      | psia                                | Pounds per square inch absolute                  |  |
| PSD Prevention of Significant Deterioration                           |  | psig                                | Pounds per square inch gauge                     |  |
| PTE   | Permanent Total Enclosure                                      | scf                                 | Standard cubic feet                              |  |
| PTI   | Permit to Install  | sec                                 | Seconds  |  |
| RACT  | Reasonably Available Control Technology                        | $SO_2$                              | Sulfur Dioxide                                   |  |
| ROP   | Renewable Operating Permit                                     | THC                                 | Total Hydrocarbons                               |  |
| SC  | Special Condition Number                                       | tpy                                 | Tons per year                                    |  |
| SCR   | Selective Catalytic Reduction                                  | μg                                  | Microgram  |  |
| SRN   | State Registration Number                                      | VOC                                 | Volatile Organic Compounds                       |  |
| TAC   | Toxic Air Contaminant  | yr                                  | Year   |  |
| TEQ   | Toxicity Equivalence Quotient                                  |                                     |  |  |
| VE  | Visible Emissions  |                                     |  |  |
|   |  |                                     |  |  |

<sup>\*</sup> For High Volume Low Pressure (HVLP) applicators, the pressure measured at the HVLP gun air cap shall not exceed ten (10) pounds per square inch gauge (psig).

Wil-Kast, Inc.

April 4, 2006

Permit No. 90-06

Page 3 of 5

#### **GENERAL CONDITIONS**

- 1. The process or process equipment covered by this permit shall not be reconstructed, relocated, or modified, unless a Permit to Install authorizing such action is issued by the Department, except to the extent such action is exempt from the Permit to Install requirements by any applicable rule. [R336.1201(1)]
- 2. If the installation, construction, reconstruction, relocation, or modification of the equipment for which this permit has been approved has not commenced within 18 months, or has been interrupted for 18 months, this permit shall become void unless otherwise authorized by the Department. Furthermore, the permittee or the designated authorized agent shall notify the Department via the Supervisor, Permit Section, Air Quality Division, Michigan Department of Environmental Quality, P.O. Box 30260, Lansing, Michigan 48909, if it is decided not to pursue the installation, construction, reconstruction, relocation, or modification of the equipment allowed by this Permit to Install. [R336.1201(4)]
- 3. If this Permit to Install is issued for a process or process equipment located at a stationary source that is not subject to the Renewable Operating Permit program requirements pursuant to R336.1210, operation of the process or process equipment is allowed by this permit if the equipment performs in accordance with the terms and conditions of this Permit to Install. [R336.1201(6)(b)]
- 4. The Department may, after notice and opportunity for a hearing, revoke this Permit to Install if evidence indicates the process or process equipment is not performing in accordance with the terms and conditions of this permit or is violating the Department's rules or the Clean Air Act. [R336.1201(8), Section 5510 of Act 451, PA 1994]
- 5. The AQD District Supervisor shall be notified, in writing, of a change in ownership or operational control of the stationary source or emission unit(s) authorized by this Permit to Install pursuant to R336.1219. The notification shall include all of the information required by R336.1219(1)(a) and (b). In addition, a new owner or operator must submit a written statement pursuant to R336.1219(1)(c), agreeing to and accepting the terms and conditions of this Permit to Install, and shall notify the AQD District Supervisor of any change in the contact person for this Pemit to Install. [R336.1219]
- 6. Operation of this equipment shall not result in the emission of an air contaminant which causes injurious effects to human health or safety, animal life, plant life of significant economic value, or property, or which causes unreasonable interference with the comfortable enjoyment of life and property. [R336.1901]
- 7. The permittee shall provide notice of an abnormal condition, start-up, shutdown, or malfunction that results in emissions of a hazardous or toxic air pollutant which continue for more than one hour in excess of any applicable standard or limitation, or emissions of any air contaminant continuing for more than two hours in excess of an applicable standard or limitation, as required in Rule 912, to the Department. The notice shall be provided not later than two business days after start-up, shutdown, or discovery of the abnormal condition or malfunction. Written reports, if required, must be filed with the Department within 10 days after the start-up or shutdown occurred, within 10 days after the abnormal conditions or malfunction has been corrected, or within 30 days of discovery of the abnormal condition or malfunction, whichever is first. The written reports shall include all of the information required in Rule 912(5). [R336.1912]
- 8. Approval of this permit does not exempt the permittee from complying with any future applicable requirements which may be promulgated under Part 55 of 1994 PA 451, as amended or the Federal Clean Air Act.

Wil-Kast, Inc.

April 4, 2006

Permit No. 90-06

Page 4 of 5

9. Approval of this permit does not obviate the necessity of obtaining such permits or approvals from other units of government as required by law nor does it affect any liability for past violations under the Natural Resources and Environmental Protection Act, 1994 PA 451.

- 10. Operation of this equipment may be subject to other requirements of Part 55 of 1994 PA 451, as amended and the rules promulgated thereunder.
- 11. Except as provided in subrules (2) and (3) or unless the special conditions of the Permit to Install include an alternate opacity limit established pursuant to subrule (4) of R336.1301, the permittee shall not cause or permit to be discharged into the outer air from a process or process equipment a visible emission of density greater than the most stringent of the following. The grading of visible emissions shall be determined in accordance with R336.1303. [R336.1301]
  - a) A six-minute average of 20 percent opacity, except for one six-minute average per hour of not more than 27 percent opacity.
  - b) A visible emission limit specified by an applicable federal new source performance standard.
  - c) A visible emission limit specified as a condition of this Permit to Install.
- 12. Collected air contaminants shall be removed as necessary to maintain the equipment at the required operating efficiency. The collection and disposal of air contaminants shall be performed in a manner so as to minimize the introduction of contaminants to the outer air. Transport of collected air contaminants in Priority I and II areas requires the use of material handling methods specified in R336.1370(2). [R336.1370]
- 13. The Department may require the permittee to conduct acceptable performance tests, at the permittee's expense, in accordance with R336.2001 and R336.2003, under any of the conditions listed in R336.2001. [R336.2001]

Wil-Kast, Inc.

Permit No. 90-06

April 4, 2006

Page 5 of 5

#### SPECIAL CONDITIONS

#### **Emission Unit Identification**

| <b>Emission Unit ID</b>  | <b>Emission Unit Description</b>   | Stack Identification |  |  |
|--|--|----------------------|--|--|
| EUZNFURNACES   | Two natural gas-fired zinc melting furnaces each has a holding capacity of 15,750 lbs. | NA                   |  |  |
| Changes to the equipment described in this table are subject to the requirements of R336.1201, except as |  |                      |  |  |
| allowed by R336.1278 to R336.1290.   |  |                      |  |  |

#### The following conditions apply to: EUZNFURNACES

### **Pollution Control Equipment: None**

#### **Material Usage Limits**

- 1.1 The permittee shall burn only natural gas in EUZNFURNACES. [R336.1201(3), R336.1224, R336.1225]
- 1.2 The permittee shall not use any flux material in EUZNFURNACES without prior notification to and approval by the AQD. [R336.1201(3)]