


**MICHIGAN DEPARTMENT OF ENVIRONMENTAL QUALITY
AIR QUALITY DIVISION**

October 1, 2007

**PERMIT TO INSTALL
No. 217-04A**

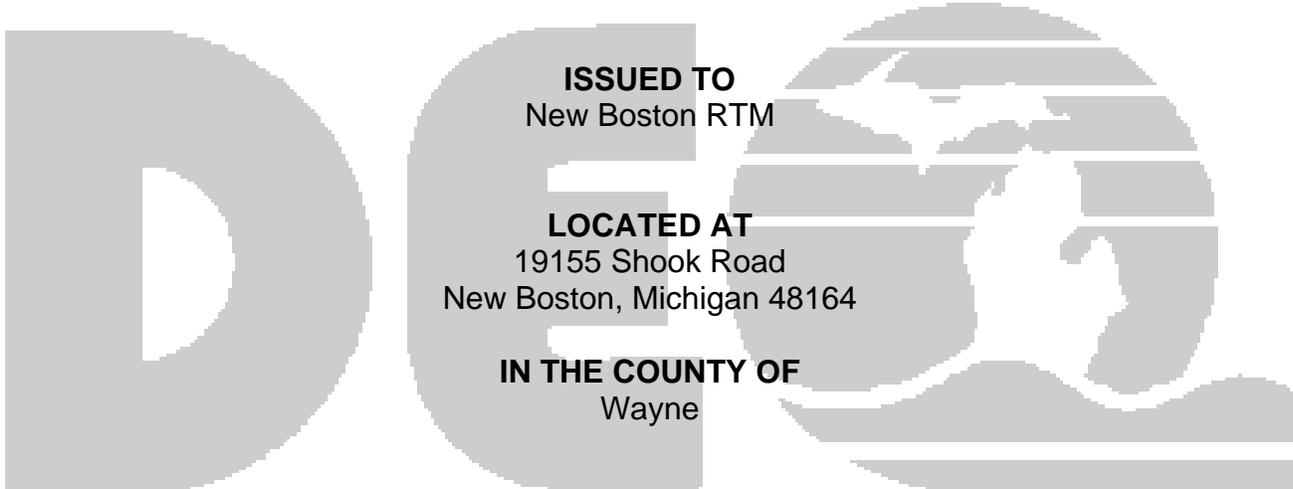

**STATE REGISTRATION NUMBER
M2973**

The Air Quality Division has approved this Permit to Install, pursuant to the delegation of authority from the Michigan Department of Environmental Quality. This permit is hereby issued in accordance with and subject to Section 5505(1) of Article II, Chapter I, Part 55, Air Pollution Control, of the Natural Resources and Environmental Protection Act, 1994 PA 451, as amended. Pursuant to Air Pollution Control Rule 336.1201(1), this permit constitutes the permittee's authority to install the identified emission unit(s) in accordance with all administrative rules of the Department and the attached conditions. Operation of the emission unit(s) identified in this Permit to Install is allowed pursuant to Rule 336.1201(6).

DATE OF RECEIPT OF ALL INFORMATION REQUIRED BY RULE 203: 9/18/2007	
DATE PERMIT TO INSTALL APPROVED: 10/1/2007	SIGNATURE:
DATE PERMIT VOIDED:	SIGNATURE:
DATE PERMIT REVOKED:	SIGNATURE:

PERMIT TO INSTALL

Table of Contents

Section	Page
Alphabetical Listing of Common Abbreviations / Acronyms.....	2
General Conditions	3
Emission Unit Identification.....	5
Flexible Group Identification	5
Emission Unit Special Conditions	6
Emission Unit Special Conditions	9
Emission Unit Special Conditions	11
Emission Unit Special Conditions	12
Emission Unit Special Conditions	14
Flexible Group Special Conditions.....	15
Appendix	
A.....	16
Appendix	
B.....	17

Common Abbreviations / Acronyms

Common Acronyms		Pollutant / Measurement Abbreviations	
AQD	Air Quality Division	Btu	British Thermal Unit
BACT	Best Available Control Technology	°C	Degrees Celsius
CAA	Clean Air Act	CO	Carbon Monoxide
CEM	Continuous Emission Monitoring	dscf	Dry standard cubic foot
CFR	Code of Federal Regulations	dscm	Dry standard cubic meter
COM	Continuous Opacity Monitoring	°F	Degrees Fahrenheit
EPA	Environmental Protection Agency	gr	Grains
EU	Emission Unit	Hg	Mercury
FG	Flexible Group	hr	Hour
FRP	Fiberglass Reinforced Plastic	H ₂ S	Hydrogen Sulfide
GACS	Gallon of Applied Coating Solids	hp	Horsepower
GC	General Condition	lb	Pound
HAP	Hazardous Air Pollutant	m	Meter
HVLP	High Volume Low Pressure *	mg	Milligram
ID	Identification	mm	Millimeter
LAER	Lowest Achievable Emission Rate	MM	Million
MACT	Maximum Achievable Control Technology	MW	Megawatts
MAERS	Michigan Air Emissions Reporting System	NO _x	Oxides of Nitrogen
MMA	Methyl Methacrylate	PM	Particulate Matter
MAP	Malfunction Abatement Plan	PM-10	Particulate Matter less than 10 microns diameter
MDEQ	Michigan Department of Environmental Quality	pph	Pound per hour
MSDS	Material Safety Data Sheet	ppm	Parts per million
NESHAP	National Emission Standard for Hazardous Air Pollutants	ppmv	Parts per million by volume
NSPS	New Source Performance Standards	ppmw	Parts per million by weight
NSR	New Source Review	psia	Pounds per square inch absolute
PS	Performance Specification	psig	Pounds per square inch gauge
PSD	Prevention of Significant Deterioration	scf	Standard cubic feet
PTE	Permanent Total Enclosure	sec	Seconds
PTI	Permit to Install	SO ₂	Sulfur Dioxide
RACT	Reasonable Available Control Technology	THC	Total Hydrocarbons
ROP	Renewable Operating Permit	tpy	Tons per year
RTM	Resin Transfer Molding	µg	Microgram
SC	Special Condition Number	VOC	Volatile Organic Compounds
SCR	Selective Catalytic Reduction	yr	Year
SRN	State Registration Number		
TAC	Toxic Air Contaminant		
VE	Visible Emissions		

* For High Volume Low Pressure (HVLP) applicators, the pressure measured at the HVLP gun air cap shall not exceed ten (10) pounds per square inch gauge (psig).

GENERAL CONDITIONS

1. The process or process equipment covered by this permit shall not be reconstructed, relocated, or modified, unless a Permit to Install authorizing such action is issued by the Department, except to the extent such action is exempt from the Permit to Install requirements by any applicable rule. **(R 336.1201(1))**
2. If the installation, construction, reconstruction, relocation, or modification of the equipment for which this permit has been approved has not commenced within 18 months, or has been interrupted for 18 months, this permit shall become void unless otherwise authorized by the Department. Furthermore, the permittee or the designated authorized agent shall notify the Department via the Supervisor, Permit Section, Air Quality Division, Michigan Department of Environmental Quality, P.O. Box 30260, Lansing, Michigan 48909, if it is decided not to pursue the installation, construction, reconstruction, relocation, or modification of the equipment allowed by this Permit to Install. **(R 336.1201(4))**
3. If this Permit to Install is issued for a process or process equipment located at a stationary source that is not subject to the Renewable Operating Permit program requirements pursuant to R 336.1210, operation of the process or process equipment is allowed by this permit if the equipment performs in accordance with the terms and conditions of this Permit to Install. **(R 336.1201(6)(b))**
4. The Department may, after notice and opportunity for a hearing, revoke this Permit to Install if evidence indicates the process or process equipment is not performing in accordance with the terms and conditions of this permit or is violating the Department's rules or the Clean Air Act. **(R 336.1201(8), Section 5510 of Act 451, PA 1994)**
5. The terms and conditions of this Permit to Install shall apply to any person or legal entity that now or hereafter owns or operates the process or process equipment at the location authorized by this Permit to Install. If the new owner or operator submits a written request to the Department pursuant to R 336.1219 and the Department approves the request, this permit will be amended to reflect the change of ownership or operational control. The request must include all of the information required by subrules (1)(a), (b), and (c) of R 336.1219. The written request shall be sent to the District Supervisor, Air Quality Division, Michigan Department of Environmental Quality. **(R 336.1219)**
6. Operation of this equipment shall not result in the emission of an air contaminant which causes injurious effects to human health or safety, animal life, plant life of significant economic value, or property, or which causes unreasonable interference with the comfortable enjoyment of life and property. **(R 336.1901)**
7. The permittee shall provide notice of an abnormal condition, start-up, shutdown, or malfunction that results in emissions of a hazardous or toxic air pollutant which continue for more than one hour in excess of any applicable standard or limitation, or emissions of any air contaminant continuing for more than two hours in excess of an applicable standard or limitation, as required in Rule 912, to the Department. The notice shall be provided not later than two business days after start-up, shutdown, or discovery of the abnormal condition or malfunction. Written reports, if required, must be filed with the Department within 10 days after the start-up or shutdown occurred, within 10 days after the abnormal conditions or malfunction has been corrected, or within 30 days of discovery of the abnormal condition or malfunction, whichever is first. The written reports shall include all of the information required in Rule 912(5). **(R 336.1912)**

8. Approval of this permit does not exempt the permittee from complying with any future applicable requirements which may be promulgated under Part 55 of 1994 PA 451, as amended or the Federal Clean Air Act.
9. Approval of this permit does not obviate the necessity of obtaining such permits or approvals from other units of government as required by law.
10. Operation of this equipment may be subject to other requirements of Part 55 of 1994 PA 451, as amended and the rules promulgated thereunder.
11. Except as provided in subrules (2) and (3) or unless the special conditions of the Permit to Install include an alternate opacity limit established pursuant to subrule (4) of R 336.1301, the permittee shall not cause or permit to be discharged into the outer air from a process or process equipment a visible emission of density greater than the most stringent of the following. The grading of visible emissions shall be determined in accordance with R 336.1303. **(R 336.1301)**
 - a) A six-minute average of 20 percent opacity, except for one six-minute average per hour of not more than 27 percent opacity.
 - b) A visible emission limit specified by an applicable federal new source performance standard.
 - c) A visible emission limit specified as a condition of this permit to install.
12. Collected air contaminants shall be removed as necessary to maintain the equipment at the required operating efficiency. The collection and disposal of air contaminants shall be performed in a manner so as to minimize the introduction of contaminants to the outer air. Transport of collected air contaminants in Priority I and II areas requires the use of material handling methods specified in R 336.1370(2). **(R 336.1370)**
13. The Department may require the permittee to conduct acceptable performance tests, at the permittee's expense, in accordance with R 336.2001 and R 336.2003, under any of the conditions listed in R 336.2001. **(R 336.2001)**

SPECIAL CONDITIONS

Emission Unit Identification

Emission Unit ID	Emission Unit Description	Stack Identification
EUMAIN	There are three (3) booths located within the Main Production building of the stationary source which are used for gelcoating operations. The injection molding operations performed in this emission unit are not done inside the spray booths.	SVNORTH SVMIDDLE SVSOUTH
EUTOOLING	There is one spray booth located within the Office/Storage building of the stationary source used for open molding operations to manufacture laminated tools (molds). Gelcoating activities are limited in the tooling booth but are included in this emission unit.	SVTOOLING
EUMISCSOLVENTS	Polishes, waxes, release coat, repair, catalyst emissions are included in this emission unit which are performed throughout the two buildings.	SVNORTH SVMIDDLE SVSOUTH SVTOOLING
EUCLEANUP	Miscellaneous cleanup activities throughout the two buildings.	SVNORTH SVMIDDLE SVSOUTH SVTOOLING
Changes to the equipment described in this table are subject to the requirements of R 336.1201, except as allowed by R 336.1278 to R 336.1290.		

Flexible Group Identification

Flexible Group ID	Emission Units Included in Flexible Group	Stack Identification
FGFIBERGLASS	EUMAIN, EUTOOLING, EUMISCSOLVENTS, EUCLEANUP	NA
FGFACILITY	All process equipment at the stationary source including equipment covered by other permits, grand-fathered equipment and exempt equipment.	NA

The following conditions apply to: EUMAIN

Description: Three spray booths located in the Main Production building. Resin/Lamination and gelcoat emissions included in this emission unit for the Main Production building.

Flexible Group ID: FGFIBERGLASS

Pollution Control Equipment: Dry filters on each booth

Emission Limits

	Pollutant	Equipment	Limit	Time Period	Testing/ Monitoring Method	Applicable Requirements
1.1a	VOC	EUMAIN	8.5 tpy	12-month rolling time period as determined at the end of each calendar month	SC 1.7	R 336.1205, R 336.1225, R 336.1702(a)
The emission limits are based upon the emission factors in Special Condition Nos. 1.2a and 1.3a and 1.3b.						

	Material	Application Method	VOC Emission Factor* (lb emitted per lb material applied)
1.2a	Production Resin	Closed Mold— Injection Molding	0.01 x %VOC

*Input the %VOC as a decimal. (R 336.1225, R 336.1702(a))

	Material	Application Method	Styrene Content (wt %)	MMA Content (wt %)	Styrene Emission Factor (lb emitted per lb material applied)	MMA Emission Factor (lb emitted per lb material applied)
1.3a	White Gelcoat	Atomized	32	10	0.1424	0.075
1.3b	Color (Non-White) Gelcoat	Atomized	32	10	0.1424	0.075

The emission factors listed are for worst case styrene content gelcoats. The emission factors will vary depending on the styrene and MMA contents of the gelcoats. Refer to the Unified Emission Factor (UEF) Table in Appendix A for further emission factor information.
(R 336.1225, R 336.1702(a))

Material Usage Limits

1.4 The permittee shall not exceed the following styrene and MMA content limits for materials used in EUMAIN:

Material	Max Styrene Content (wt%)	Max MMA Content (wt%)
Production Resin (Closed mold)	60	3

White Gelcoat	32	10
Color (Non White) gelcoat (R 336.1224, R 336.1225, R 336.1702(a))	32	10

Equipment

1.5 The permittee shall not operate any booth associated with EUMAIN unless its respective exhaust filter is installed, maintained and operated in a satisfactory manner. **(R 336.1301, R 336.1331, R 336.1901)**

Recordkeeping/Reporting/Notification

1.6 All required calculations shall be completed in a format acceptable to the AQD District Supervisor and made available by the 15th day of the calendar month, for the previous calendar month, unless otherwise specified in any recordkeeping, reporting or notification special condition. **(R 336.1225, R 336.1702(a))**

1.7 The permittee shall keep the following information for each calendar month for EUMAIN:

- a) The identity and amount (in pounds) of each resin and gelcoat material used.
- b) The styrene and MMA content of each resin and gelcoat used.
- c) The appropriate emission factor for each raw material used (refer to the UEF table in Appendix A or Special Condition Nos. 1.2a and 1.3a, 1.3b).
- d) VOC emission calculations determining the monthly emission rate in tons per calendar month, and the annual emission rate in tons per 12-month rolling time period as determined at the end of each calendar month.

The records shall be kept in a format according to Appendix B or a method acceptable to the AQD District Supervisor. All records shall be kept on file for a period of at least five years and made available to the Department upon request. **(R 336.1205, R 336.1225, R 336.1702(a))**

Stack/Vent Restrictions

	Stack & Vent ID	Maximum Diameter (inches)	Minimum Height Above Ground Level (feet)	Applicable Requirements
1.8a	SVNORTH	30	25	R 336.1225, R 336.1901, R 336.2803, R 336.2804, 40 CFR 52.21(c) and (d)
1.8b	SVMIDDLE	30	25	R 336.1225, R 36.1901, R 336.2803, R 336.2804, 40 CFR 52.21(c) and (d)

	Stack & Vent ID	Maximum Diameter (inches)	Minimum Height Above Ground Level (feet)	Applicable Requirements
1.8c	SVSOUTH	30	25	R 336.1225, R 336.1901, R 336.2803, R 336.2804, 40 CFR 52.21(c) and (d)
The exhaust gases shall be discharged unobstructed vertically upwards to the ambient air.				

The following conditions apply to: EUTOOLING

Description: One spraybooth located within the Storage/Office building. The booth is used to manufacture molds (tools). Tooling resins used here and small amounts of gelcoat.

Flexible Group ID: FGFIBERGLASS

Pollution Control Equipment: Dry filters

Emission Limits

	Pollutant	Equipment	Limit	Time Period	Testing/ Monitoring Method	Applicable Requirements
2.1a	VOC	EUTOOLING	6.4 tpy	12-month rolling time period as determined at the end of each calendar month.	SC 2.6	R 336.1205, R 336.1225, R 336.1702(a)
The emission limits are based upon the emission factors in Special Condition Nos. 2.2a and 2.2b.						

	Material	Application Method	Styrene Content (wt %)	MMA Content (wt %)	Styrene Emission Factor (lb emitted per lb material applied)	MMA Emission Factor (lb emitted per lb material applied)
2.2a	Tooling Resin	Open Mold- Manual	48	2	0.085	NA
2.2b	Tooling Gelcoat	Atomized	50	4	0.323	0.030

*Other VOCs contained in the tooling resin are assumed to be 100% emitted.

Emission factors listed are for the worst case styrene and MMA contents for tooling resin and tooling gelcoats. The emission factors will vary depending on the styrene and MMA contents of the resin and gelcoats. Refer to the Unified Emission Factor (UEF) Table in Appendix A for further information. **(R 336.1225, R 336.1702(a))**

Material Usage Limits

2.3 The permittee shall not exceed the following styrene and MMA content limits for materials used in EUTOOLING:

Material	Max Styrene Content (wt%)	Max MMA Content (wt%)
Tooling Resin (Open mold)	48	2
Tooling Gelcoat	50	4

(R 336.1224, R 336.1225, R 336.1702(a))

Equipment

2.4 The permittee shall not operate any booth associated with EUTOOLING unless its respective exhaust filter is installed, maintained and operated in a satisfactory manner. **(R 336.1301, R 336.1331, R 336.1901)**

Recordkeeping/Reporting/Notification

2.5 All required calculations shall be completed in a format acceptable to the AQD District Supervisor and made available by the 15th day of the calendar month, for the previous calendar month, unless otherwise specified in any recordkeeping, reporting or notification special condition. **(R 336.1205, R 336.1225, R 336.1702(a))**

2.6 The permittee shall keep the following information for each calendar month for EUTOOLING:

- a) The identity and amount (in pounds) of each tooling resin and tooling gelcoat used.
- b) The styrene content of each tooling resin and tooling gelcoat used.
- c) The MMA content of each tooling resin and gelcoat used.
- d) The appropriate emission factor for each raw material used (refer to the UEF table in Appendix A or Special Condition Nos. 2.2a and 2.2b).
- e) VOC emission calculations determining the monthly emission rate in tons per calendar month, and the annual emission rate in tons per 12-month rolling time period as determined at the end of each calendar month.

The records shall be kept in a format according to Appendix B or a method acceptable to the AQD District Supervisor. All records shall be kept on file for a period of at least five years and made available to the Department upon request. **(R 336.1205, R 336.1225, R 336.1702(a))**

Stack/Vent Restrictions

	Stack & Vent ID	Maximum Diameter (inches)	Minimum Height Above Ground Level (feet)	Applicable Requirements
2.7	SVTOOLING	30	25	R 336.1225, R 336.1901, R 336.2803, R 336.2804, 40 CFR 52.21(c) and (d)
The exhaust gases shall be discharged unobstructed vertically upwards to the ambient air.				

The following conditions apply to: EUMISCSOLVENTS

Description: Miscellaneous solvents (mold release, catalyst, polishes, etc.) used throughout both buildings of the stationary source.

Flexible Group ID: FGFIBERGLASS

Emission Limits

	Pollutant	Equipment	Limit	Time Period	Testing/ Monitoring Method	Applicable Requirements
3.1a	VOC	EUMISCSOLVENT S	3.0 tpy	12-month rolling time period as determined at the end of each calendar month.	SC 3.3	R 336.1205, R 336.1225, R 336.1702(a)

Recordkeeping/Reporting/Notification

3.2 All required calculations shall be completed in a format acceptable to the AQD District Supervisor and made available by the 15th day of the calendar month, for the previous calendar month, unless otherwise specified in any recordkeeping, reporting or notification special condition. **(R 336.1205, R 336.1225, R 336.1702(a))**

3.3 The permittee shall keep the following information for each calendar month for EUMISCSOLVENTS:

- a) The identity and amount (in pounds) of any catalyst, mold release, polishes, waxes, or other VOC containing materials used that are not resins, gelcoats or cleanup solvents.
- b) The VOC content of any catalyst, mold release, polishes, waxes, or other VOC containing materials used that are not resins, gelcoats or cleanup solvents.
- c) VOC emission calculations determining the monthly emission rate in tons per calendar month, and the annual emission rate in tons per 12-month rolling time period as determined at the end of each calendar month.

The records shall be kept in a format acceptable to the AQD District Supervisor. All records shall be kept on file for a period of at least five years and made available to the Department upon request. **(R 336.1205, R 336.1225, R 336.1702(a))**

Stack/Vent Restrictions

	Stack & Vent ID	Maximum Diameter (inches)	Minimum Height Above Ground Level (feet)	Applicable Requirements
3.4a	SVNORTH	30	25	R 336.1225, R 336.1901, R336.2803, R 336.2804, 40 CFR 52.21(c) and (d)

	Stack & Vent ID	Maximum Diameter (inches)	Minimum Height Above Ground Level (feet)	Applicable Requirements
3.4b	SVMIDDLE	30	25	R 336.1225, R 336.1901, R 336.2803, R 336.2804, 40 CFR 52.21(c) and (d)
3.4c	SVSOUTH	30	25	R 336.1225, R 336.1901, R 336.2803, R 336.2804, 40 CFR 52.21(c) and (d)
3.4d	SVTOOLING	30	25	R 336.1225, R 336.1901, R 336.2803, R 336.2804, 40 CFR 52.21(c) and (d)
The exhaust gases shall be discharged unobstructed vertically upwards to the ambient air.				

The following conditions apply to: EUCLEANUP

Description: Miscellaneous cleanup activities throughout both buildings of the stationary source.

Flexible Group ID: FGFACILITY

Emission Limits

	Pollutant	Equipment	Limit	Time Period	Testing/ Monitoring Method	Applicable Requirements
4.1a	Acetone	EUCLEANUP	20.0 tpy	12-month rolling time period as determined at the end of each calendar month	SC 4.3	R 336.1224
4.1b	VOC	EUCLEANUP	1.0 tpy	12-month rolling time period as determined at the end of each calendar month	SC 4.3	R 336.1702(a)

Recordkeeping/Reporting/Notification

4.2 All required calculations shall be completed in a format acceptable to the AQD District Supervisor and made available by the 15th day of the calendar month, for the previous calendar

month, unless otherwise specified in any recordkeeping, reporting or notification special condition. **(R 336.1224, R 336.1225, R 336.1702(a))**

4.3 The permittee shall keep the following information on a monthly basis for EUCLEANUP:

- a) The identity of each clean-up solvent used.
- b) The amount (in gallons or pounds) of each clean-up solvent used.
- c) Acetone emission calculations determining the monthly emission rate in tons per calendar month, and the annual emission rate in tons per 12-month rolling time period as determined at the end of each calendar month.
- d) VOC emission calculations determining the monthly emission rate in tons per calendar month, and the annual emission rate in tons per 12-month rolling time period as determined at the end of each calendar month.

The records shall be kept in a format acceptable to the AQD District Supervisor. All records shall be kept on file for a period of at least five years and made available to the Department upon request. **(R 336.1224, R 336.1225, R 336.1702(a))**

The following conditions apply to: FGFIBERGLASS

Flexible Group ID: EUMAIN, EUTOOLING, EUCLEANUP

Process/Operational Limits

- 5.1 All waste cleanup solvent(s), catalyst(s), resin(s), gelcoat(s), and other materials used in FGFIBERGLASS shall be captured and stored in closed containers and disposed of in an acceptable manner in compliance with all applicable state rules and federal regulations. **(R 336.1224, R 336.1702(a))**

Recordkeeping/Reporting/Notification

- 5.2 All required calculations shall be completed in a format acceptable to the AQD District Supervisor and made available by the 15th day of the calendar month, for the previous calendar month, unless otherwise specified in any recordkeeping, reporting or notification special condition. **(R 336.1205, R 336.1224, R 336.1225, R 336.1702(a))**
- 5.3 The permittee shall maintain a current listing from the manufacturer of the chemical composition of each material (i.e lamination resin, gelcoat, catalyst, mold release, polish, etc.), including the weight percent of each component. The data may consist of Material Safety Data Sheets, manufacturer's formulation data, or both as deemed acceptable by the AQD District Supervisor. All records shall be kept on file for a period of at least five years and made available to the Department upon request. **(R 336.1224, R 336.1225, R 336.1702(a))**

The following conditions apply to: FGFACILITY

Emission Limits

	Pollutant	Equipment	Limit	Time Period	Testing/ Monitoring Method	Applicable Requirements
6.1a	Each Individual HAP	FGFACILITY	Less than 9.0 tpy	12-month rolling time period as determined at the end of each calendar month	SC 6.4	R 336.1205(3)
6.1b	Aggregate HAPs	FGFACILITY	Less than 22.5 tpy	12-month rolling time period as determined at the end of each calendar month	SC 6.4	R 336.1205(3)

Testing

6.2 The HAP content of any material (i.e resin, gelcoat, mold release, waxes, etc.) as received and as applied, shall be determined using manufacturer's formulation data. Upon request of the AQD District Supervisor, the manufacturer's HAP formulation data shall be verified using EPA Test Method 311. **(R 336.1205(3))**

Recordkeeping / Reporting / Notification

6.3 All required calculations shall be completed in a format acceptable to the AQD District Supervisor and made available by the 15th day of the calendar month, for the previous calendar month, unless otherwise specified in any recordkeeping, reporting or notification special condition. **(R 336.1205(3))**

6.4 The permittee shall keep the following information on a monthly basis for FGFACILITY:

- a) Gallons or pounds of each HAP containing material used.
- b) Where applicable, gallons or pounds of each HAP containing material reclaimed.
- c) HAP content, in pounds per gallon or pounds per pound, of each HAP containing material used.
- d) Individual and aggregate HAP emission calculations determining the monthly emission rate of each in tons per calendar month.
- e) Individual and aggregate HAP emission calculations determining the annual emission rate of each in tons per 12-month rolling time period as determined at the end of each calendar month.

The records shall be kept in a format acceptable to the AQD District Supervisor. All records shall be kept on file for a period of at least five years and made available to the Department upon request. **(R 336.1205(3))**

APPENDIX A:

**Unified Emission Factors for Open Molding of Composites
July 23, 2001
Emission Rate in Pounds of Styrene Emitted per Ton of Resin or Gelcoat Processed**

Styrene content in resin /gelcoat, % ⁽¹⁾	<33 ⁽²⁾	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	>50 ⁽²⁾
Manual	0.126 x %styrene x 2000	83	89	94	100	106	112	117	123	129	134	140	146	152	157	163	169	174	180	((0.286 x %styrene) - 0.0529) x 2000
Manual w/Vapor Suppressed Resin VSR ⁽³⁾		Manual emission factor [listed above] x (1 - (0.50 x specific VSR reduction factor for each resin/suppressant formulation))																		
Mechanical Atomized	0.169 x %styrene x 2000	111	126	140	154	168	183	197	211	225	240	254	268	283	297	311	325	340	354	((0.714 x %styrene) - 0.18) x 2000
Mechanical Atomized with VSR ⁽³⁾		Mechanical Atomized emission factor [listed above] x (1 - (0.45 x specific VSR reduction factor for each resin/suppressant formulation))																		
Mechanical Atomized Controlled Spray ⁽⁴⁾	0.130 x %styrene x 2000	86	97	108	119	130	141	152	163	174	185	196	207	218	229	240	251	262	273	0.77 x ((0.714 x %styrene) - 0.18) x 2000
Mechanical Controlled Spray with VSR		Mechanical Atomized Controlled Spray emission factor [listed above] x (1 - (0.45 x specific VSR reduction factor for each resin/suppressant formulation))																		
Mechanical Non-Atomized	0.107 x %styrene x 2000	71	74	77	80	83	86	89	93	96	99	102	105	108	111	115	118	121	124	((0.157 x %styrene) - 0.0165) x 2000
Mechanical Non-Atomized with VSR ⁽³⁾		Mechanical Non-Atomized emission factor [listed above] x (1 - (0.45 x specific VSR reduction factor for each resin/suppressant formulation))																		
Filament Application	0.184 x %styrene x 2000	122	127	133	138	144	149	155	160	166	171	177	182	188	193	199	204	210	215	((0.2746 x %styrene) - 0.0298) x 2000
Filament Application with VSR ⁽³⁾	0.120 x %styrene x 2000	79	83	86	90	93	97	100	104	108	111	115	118	122	125	129	133	136	140	0.65 x ((0.2746 x %styrene) - 0.0298) x 2000
Gelcoat Application	0.445 x %styrene x 2000	294	315	336	356	377	398	418	439	460	481	501	522	543	564	584	605	626	646	((1.03646 x %styrene) - 0.195) x 2000
Gelcoat Controlled Spray Application ⁽⁴⁾	0.325 x %styrene x 2000	215	230	245	260	275	290	305	321	336	351	366	381	396	411	427	442	457	472	0.73 x ((1.03646 x %styrene) - 0.195) x 2000
Gelcoat Non-Atomized Application ⁽⁸⁾	SEE Note 9 below	196	205	214	223	232	241	250	259	268	278	287	296	305	314	323	332	341	350	((0.4506 x %styrene) - 0.0505) x 2000
Covered-Cure after Roll-Out		Non-VSR process emission factor [listed above] x (0.80 for Manual <or> 0.85 for Mechanical)																		
Covered-Cure without Roll-Out		Non-VSR process emission factor [listed above] x (0.50 for Manual <or> 0.55 for Mechanical)																		

Emission Rate in Pounds of Methyl Methacrylate Emitted per Ton of Gelcoat Processed

MMA content in gelcoat, % ⁽⁶⁾	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	≥20
Gel coat application ⁽⁷⁾	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270	285	0.75 x %MMA x 2000

Notes

- Including styrene monomer content as supplied, plus any extra styrene monomer added by the molder, but before addition of other additives such as powders, fillers, glass...etc.
- Formulas for materials with styrene content <33% are based on the emission rate at 33% (constant emission factor expressed as percent of available styrene), and for styrene content >50% on the emission rate based on the extrapolated factor equations; these are not based on test data but are believed to be conservative estimates. The value for "% styrene" in the formulas should be input as a fraction. For example, use the input value 0.30 for a resin with 30% styrene content by wt.
- The VSR reduction factor is determined by testing each resin/suppressant formulation according to the procedures detailed in the CFA Vapor Suppressant Effectiveness Test.
- SEE the CFA Controlled Spray Handbook for a detailed description of the controlled spray procedures.
- The effect of vapor suppressants on emissions from filament winding operations is based on the Dow Filament Winding Emissions Study.
- Including MMA monomer content as supplied, plus any extra MMA monomer added by the molder, but before addition of other additives such as powders, fillers, glass...etc.
- Based on gelcoat data from NMMA Emission Study.
- SEE the July 17, 2001 EECS report Emission Factors for Non-Atomized Application of Gel Coats used in the Open Molding of Composites for a detailed description of the Non-Atomized gelcoat testing.
- Use the equation ((0.4506 x %styrene) - 0.0505) x 2000 for gelcoats with styrene contents between 19% and 32% by wt.; use the equation 0.185 x %styrene x 2000 for gelcoats with less than 19% styrene content by wt.

Appendix B

Resin Process:

Resin Description	A Resin Usage (lb/mo)	B Styrene Content ¹ (% by wt. as supplied)	C Styrene Emission Factor ² (lb emitted/lb material applied)	D Calendar Month Styrene Emissions (lb/mo)
-------------------	------------------------------------	---	--	--

Total Pounds Styrene/VOC Emitted per Calendar Month from Resin, **E =** (sum of all D's) **E =**

Catalyst:

Catalyst Description	F Catalyst Usage (lb/mo)	G VOC ³ (% by wt.)	H Calendar Month VOC Emissions (lb/mo)
----------------------	------------------------------------	---	---

Total Lbs. VOC Emitted from Catalyst per Month, **I =** (sum of all H's) **I =**

Emission Unit Totals:

Emission Unit Tons VOC Emitted per Calendar Month, **J =** (E + I) / 2000 **J =**

12-Month Rolling Emission Unit Totals:

Emission Unit 12-Month Rolling Period VOC Emitted (Tons), **K =** I + Total of 11
Previous Months **K =**

1. Styrene content shall be determined as supplied, plus any extra styrene added by the molder, but before the addition of other additives such as fillers, glass, catalyst, etc.
2. The emission factor for resin processes depends upon if the process is open or closed mold. Refer to Special Condition Nos. 1.2a and 2.2a.
3. Determine VOC content for catalyst (Luperox DDM-9*Red, Luperox DDM-9, Lupersol DDM-9) as follows: Catalyst VOC = 2% by weight. (This is based on maximum Methyl Ethyl Ketone content per supplier MSDS).
NOTE: The other organic ingredients in the catalyst, including Methyl Ethyl Ketone Peroxide and 2,2,4-Trimethylpentanediol-1,3-Diisobutyrate, may be considered as either totally consumed in the cross-linking reactions or non-volatile. Also, hydrogen peroxide is not an organic compound.

Appendix B

Gelcoat ID: _____
Styrene Content¹ (% wt) _____

MMA Content (%wt) _____

A	B	C	D = A x B	E = A x C	F = D + E
Gelcoat Usage (lb/mo)	Styrene Emission Factor (lb. emitted/lb. gelcoat applied)	MMA Emission Factor (lb. emitted/lb. gelcoat applied)	Calendar Month Styrene Emissions (lb/mo)	Calendar Month MMA Emissions (lb/mo)	Calendar Month VOC emissions (lb/mo)

Total Lbs. VOC Emitted per Calendar Month from Gelcoat, **G** = (sum of all F's) **G** =

Catalyst:

Catalyst Description	H	I	J
	Catalyst Usage (lb/mo)	VOC ² (% by wt.)	Calendar Month VOC Emissions (lb/mo)

Total Lbs. VOC Emitted from Catalyst per Month, **K** = (sum of all J's) **K** =

Emission Unit Totals:

Emission Unit Tons VOC Emitted per Calendar Month, **L** = (G + K) / 2000
L =

12-Month Rolling Emission Unit Totals:

Emission Unit 12-Month Rolling Period VOC Emitted (Tons), **M** = L + Total of 11 Previous Months
M =

1. Styrene content shall be determined as supplied, plus any extra styrene added by the molder, but before the addition of other additives such as fillers, glass, catalyst, etc.
2. Determine VOC content for catalyst (Luperox DDM-9*Red, Luperox DDM-9, Lupersol DDM-9) as follows: Catalyst VOC = 2% by weight. (This is based on maximum Methyl Ethyl Ketone content per supplier MSDS).
NOTE: The other organic ingredients in the catalyst, including Methyl Ethyl Ketone Peroxide and 2,2,4-Trimethylpentanediol-1,3-Diisobutyrate, may be considered as either totally consumed in the cross-linking reactions or non-volatile. Also, hydrogen peroxide is not an organic compound.