

RECEIVED

SEP 26 2023

AIR QUALITY DIVISION

**AIR EMISSION TEST REPORT  
FOR THE  
VERIFICATION OF AIR POLLUTANT EMISSIONS  
FROM A  
LANDFILL GAS FIRED ENGINE – GENERATOR SET**

**Prepared for:  
North American Natural Resources, Inc.  
Peoples Generating Facility  
SRN N5397**

**ICT Project No.: 2300142  
August 30, 2023**





## Executive Summary

NORTH AMERICAN NATURAL RESOURCES, INC. AT THE PEOPLES GENERATING  
STATION  
CAT® G3516 LANDFILL GAS FUELED IC ENGINE EMISSIONS TEST RESULTS

North American Natural Resources, Inc. (NANR) contracted Impact Compliance & Testing, Inc. (ICT) to conduct a performance demonstration for the determination of carbon monoxide (CO), nitrogen oxides (NOx) and volatile organic compounds (VOC) concentrations and emission rates from one (1) CAT® Model G3516 landfill gas-fired reciprocating internal combustion engine (RICE) and electricity generator set (genset) operated at the NANR Peoples Generating Station (Peoples) in Birch Run, Michigan.

The compliance emission testing was performed pursuant to conditions of Michigan Department of Environment, Great Lakes and Energy – Air Quality Division (EGLE-AQD) Renewable Operating Permit (ROP) No. MI-ROP-N5397-2019b, which requires that testing be performed every 8,760 operating hours or three years, whichever occurs first. The following table presents the emissions results and operating data from the performance demonstration.

Unit ID	Generator Output kW	CO		NOx		VOC	
		lb/hr	g/bhp-hr	lb/hr	g/bhp-hr	lb/hr	g/bhp-hr
EUENGINE3	801	6.3	2.56	1.07	0.43	0.54	0.22
<i>Permit Limit</i>	-	6.9	2.7	3.8	1.5	2.16	0.8

kW=kilowatt, lb/hr = pounds per hour, g/bhp-hr = grams per brake horsepower hour

The data above indicates that the engine was tested while the unit operated within 10% of the maximum capacity (800 kW) and is in compliance with the emission standards specified in MI-ROP-N5397-2019b.

# Report Certification


---

**AIR EMISSION TEST REPORT  
FOR THE  
VERIFICATION OF AIR POLLUTANT EMISSIONS  
FROM A  
LANDFILL GAS FIRED ENGINE – GENERATOR SET**

**NANR Peoples Generating Facility  
Pierson, MI**

The material and data in this document were prepared under the supervision and direction of the undersigned.

Impact Compliance & Testing, Inc.

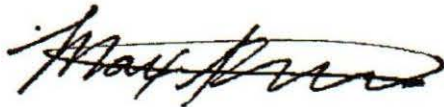

---

Max Fierro  
Environmental Consultant



## Table of Contents

---

<b>1.0 INTRODUCTION.....</b>	<b>1</b>
<b>2.0 SUMMARY OF TEST RESULTS AND OPERATING CONDITIONS .....</b>	<b>3</b>
2.1 Purpose and Objective of the Tests.....	3
2.2 Operating Conditions During the Compliance Tests.....	3
2.3 Summary of Air Pollutant Sampling Results .....	3
<b>3.0 SOURCE AND SAMPLING LOCATION DESCRIPTION.....</b>	<b>5</b>
3.1 General Process Description.....	5
3.2 Rated Capacities and Air Emission Controls .....	5
3.3 Sampling Locations .....	5
<b>4.0 SAMPLING AND ANALYTICAL PROCEDURES .....</b>	<b>6</b>
4.1 Summary of Sampling Methods.....	6
4.2 Exhaust Gas Velocity Determination (USEPA Method 2).....	7
4.3 Exhaust Gas Molecular Weight Determination (USEPA Methods 3A).....	7
4.4 Exhaust Gas Moisture Content (USEPA Method 4).....	7
4.5 NO <sub>x</sub> and CO Concentration Measurements (USEPA Methods 7E and 10).....	8
4.6 Measurement of VOC (USEPA Method 25A / ALT-096).....	8
<b>5.0 QA/QC ACTIVITIES .....</b>	<b>9</b>
5.1 Flow Measurement Equipment.....	9
5.2 NO <sub>x</sub> Converter Efficiency Test .....	9
5.3 Gas Divider Certification (USEPA Method 205).....	9
5.4 Instrumental Analyzer Interference Check.....	9
5.5 Instrument Calibration and System Bias Checks .....	10
5.6 Determination of Exhaust Gas Stratification .....	10
5.7 System Response Time .....	10
5.8 Meter Box Calibrations .....	10
5.9 Cyclonic Flow Check .....	11
<b>6.0 RESULTS .....</b>	<b>12</b>
6.1 Test Results and Allowable Emission Limits.....	12
6.2 Variations from Normal Sampling Procedures or Operating Conditions .....	12

## List of Tables

---

2.1	Average operating conditions during the test periods.....	4
2.2	Average measured air pollutant concentrations for the engine (three-test average).....	4
6.1	Measured exhaust gas conditions and air pollutant emission rates for Engine No. 3 (EUENGINE3) .....	12

## List of Appendices

---

APPENDIX 1	SAMPLING DIAGRAMS
APPENDIX 2	OPERATING RECORDS
APPENDIX 3	FLOWRATE CALCULATIONS AND DATA SHEETS
APPENDIX 4	CO <sub>2</sub> , O <sub>2</sub> , CO, NO <sub>X</sub> , AND VOC CALCULATIONS
APPENDIX 5	INSTRUMENTAL ANALYZER RAW DATA
APPENDIX 6	QA/QC RECORDS



# 1.0 Introduction

North American Natural Resources (NANR) operates gas-fired reciprocating internal combustion engines (RICE) and electricity generator sets at the Peoples Generating Facility in Pierson, Saginaw County, Michigan. The RICE are fueled by landfill gas (LFG) that is recovered from the Peoples Landfill. The recovered gas is transferred to the NANR facility where it is treated before being used as fuel.

The State of Michigan Department of Environment, Great Lakes and Energy – Air Quality Division (EGLE-AQD) has issued to NANR Renewable Operating Permit (ROP) No. MI-ROP-N5397-2019b for operation of the renewable electricity generation facility, which consists of:

- Five (5) Caterpillar (CAT®) Model No. 3516 RICE-generator set identified as emission units EUENGINE1,2,3,4, and 6 (Flexible Group ID: FGRICEENG)

Air emission compliance testing was performed pursuant to MI-ROP-N5397-2019b:

1. *The permittee shall verify NOx, CO, HCl, or VOC emission rates from one or more engine(s) from EUENGINE#1, EUENGINE#2, EUENGINE#3, and EUENGINE#4, by testing at owner's expense, in accordance with Department requirements, on or before six months of the ROP expiration date and upon request from the AQD District Supervisor.*

The compliance testing presented in this report was performed by Impact Compliance & Testing, Inc. (ICT), a Michigan-based environmental consulting and testing company. ICT representatives Max Fierro and Christian Smith performed the field sampling and measurements August 1<sup>st</sup>, 2023.

The engine emission performance tests consisted of triplicate, one-hour sampling periods for nitrogen oxides (NOx), carbon monoxide (CO), and volatile organic compounds (VOC, as non-methane hydrocarbons (NMHC or NMOC)). HCl was not required in this testing event due to permit condition FGRICEENG V. 1. Exhaust gas velocity, moisture, oxygen (O<sub>2</sub>) content, and carbon dioxide (CO<sub>2</sub>) content were determined for each test period to calculate volumetric exhaust gas flowrate and pollutant mass emission rates.

The exhaust gas sampling and analysis was performed using procedures specified in the Stack Test Protocol dated June 2, 2023, that was reviewed and approved by EGLE-AQD on July 24, 2023. Mr. Daniel Droste of EGLE-AQD observed portions of the compliance testing.

Questions regarding this air emission test report should be directed to:

Max Fierro Environmental Consultant Impact Compliance & Testing, Inc. 4180 Keller Rd, Suite B Holt MI 48852 (734) 357-8397 Max.Fierro@ImpactCandT.com	Mr. Mike Williams Specialist-Engineer/Tech Sr II Kinder Morgan 1001 Louisiana Street Houston, TX 77002 (281) 725-1383 Michael_J_Williams@kindermorgan.com
---	---

RECEIVED

SEP 26 2023

## 2.0 Summary of Test Results and Operating Conditions

---

### 2.1 Purpose and Objective of the Tests

Conditions of MI-ROP-N5397-2019b require NANR to test Engine No. 3 (Emission Unit: EUENGINE3) for CO, NO<sub>x</sub>, HCl, or VOC emissions. Engine No. 3 / EUENGINE3 was tested for CO, NO<sub>x</sub>, and VOC during this compliance test event.

### 2.2 Operating Conditions During the Compliance Tests

The testing was performed while the NANR engine/generator set was operated at maximum operating conditions (within 10% of 800-kilowatt (kW) electricity output). NANR representatives monitored and recorded generated power output (kW), fuel use (standard cubic feet per minute, scfm), and fuel methane content (%) at 15-minute increments for each test period.

Appendix 2 provides operating records provided by NANR representatives for the test periods.

Table 2.1 presents a summary of the average engine operating conditions during the test periods.

Average output, fuel consumption, and fuel methane content for the RICE are presented in Table 2.1 and Table 6.1.

### 2.3 Summary of Air Pollutant Sampling Results

The gas exhausted from the sampled LFG fueled RICE (Engine No. 3 / EUENGINE3) was sampled for three (3) one-hour test periods during the compliance testing performed August 1, 2023.

Table 2.2 presents the average measured CO, NO<sub>x</sub>, and VOC emission rates for the engine (average of the three test periods).

Test results for each one-hour sampling period and comparison to the permitted emission rates are presented in Section 6.0 of this report.



**Table 2.1 Average engine operating conditions during the test periods**

Engine Parameter	EUENGINE3 CAT® G3516
Generator output (kW)	802
Engine output (bhp)	1,119
Engine LFG fuel use (scfm)	303
LFG methane content (%)	53.0
Exhaust temperature (°F)	794

**Table 2.2 Average measured emission rates for the engine (three-test average)**

Emission Unit	CO		NOx		VOC	
	(lb/hr)	(g/bhp-hr)	(lb/hr)	(g/bhp-hr)	(lb/hr)	(g/bhp-hr)
EUENGINE3	6.3	2.56	1.07	0.43	0.54	0.22
<b>Permit Limit</b>	<b>6.9</b>	<b>2.7</b>	<b>4.94</b>	<b>1.5</b>	<b>2.16</b>	<b>0.8</b>

## 3.0 Source and Sampling Location Description

---

### 3.1 General Process Description

NANR is permitted to operate five (5) CAT 3516 RICE-generator sets at its facility. The units are fired exclusively with LFG that is recovered from the Peoples Landfill solid waste disposal facility and treated prior to use. Only one (1) CAT® Model No. G3516 RICE (EUENGINE3) was tested for this event.

### 3.2 Rated Capacities and Air Emission Controls

The CAT® G3516 engine generator set has a rated design capacity of:

- Engine Power: 1,148 brake horsepower (bhp)
- Electricity Generation: 800 kW

The engine is equipped with a manual air-to-fuel ratio (AFR) controller that blends the appropriate ratio of combustion air and treated LFG fuel.

The RICE are not equipped with add-on emission control devices. The AFR controller maintains efficient fuel combustion, which minimizes air pollutant emissions. Exhaust gas is exhausted directly to the atmosphere through noise mufflers and vertical exhaust stacks.

### 3.3 Sampling Locations

The Engine No. 3 / EUENGINE3 exhaust gas is directed through a muffler and is released to the atmosphere through a dedicated vertical exhaust stack with a vertical release point.

The Engine No. 3 / EUENGINE3 exhaust stack sampling ports are located after the muffler in a vertical portion of the stack with an inner diameter of 12.0 inches. The stack is equipped with two (2) sample ports, opposed 90°, that provide a sampling location 30 inches (2.5 duct diameters) upstream and 33 inches (2.75 duct diameters) downstream from any flow disturbance.

All sample port locations satisfy the USEPA Method 1 criteria for a representative sample location. Individual traverse points were determined in accordance with USEPA Method 1.

Appendix 1 provides a diagram of the emission test sampling locations with actual stack dimension measurements.

## 4.0 Sampling and Analytical Procedures

---

A Stack Test Protocol for the air emission testing was reviewed and approved by EGLE-AQD. This section provides a summary of the sampling and analytical procedures that were used during the testing periods.

### 4.1 Summary of Sampling Methods

USEPA Method 1	Exhaust gas velocity measurement locations were determined based on the physical stack arrangement and requirements in USEPA Method 1.
USEPA Method 2	Exhaust gas velocity pressure was determined using a Type-S Pitot tube connected to a red oil incline manometer; temperature was measured using a K-type thermocouple connected to the Pitot tube.
USEPA Method 3A	Exhaust gas O <sub>2</sub> and CO <sub>2</sub> content was determined using paramagnetic and infrared instrumental analyzers, respectively.
USEPA Method 4	Exhaust gas moisture was determined based on the water weight gain in chilled impingers.
USEPA Method 7E	Exhaust gas NO <sub>x</sub> concentration was determined using chemiluminescence instrumental analyzers.
USEPA Method 10	Exhaust gas CO concentration was measured using an infrared instrumental analyzer.
USEPA Method 25A / ALT-096	Exhaust gas VOC (as NMHC) concentration was determined using a flame ionization analyzer equipped with methane separation column.



## 4.2 Exhaust Gas Velocity Determination (USEPA Method 2)

The RICE exhaust stack gas velocities and volumetric flow rates were determined using USEPA Method 2 once during each test period. An S-type Pitot tube connected to a red-oil manometer was used to determine velocity pressure at each traverse point across the stack cross section. Gas temperature was measured using a K-type thermocouple mounted to the Pitot tube. The Pitot tube and connective tubing were leak-checked periodically throughout the test periods to verify the integrity of the measurement system.

The absence of significant cyclonic flow at the sampling location was verified using an S-type Pitot tube and oil manometer. The Pitot tube was positioned at each velocity traverse point with the planes of the face openings of the Pitot tube perpendicular to the stack cross-sectional plane. The Pitot tube was then rotated to determine the null angle (rotational angle as measured from the perpendicular, or reference, position at which the differential pressure is equal to zero).

Appendix 3 provides exhaust gas flowrate calculations and field data sheets.

## 4.3 Exhaust Gas Molecular Weight Determination (USEPA Method 3A)

CO<sub>2</sub> and O<sub>2</sub> content in the RICE exhaust gas stream was measured continuously throughout each test period in accordance with USEPA Method 3A. The CO<sub>2</sub> content of the exhaust was monitored using a Servomex 1440D infrared gas analyzer. The O<sub>2</sub> content of the exhaust was monitored using a Servomex 1440D gas analyzer that uses a paramagnetic sensor.

During each sampling period, a continuous sample of the RICE exhaust gas stream was extracted from the stack using a stainless-steel probe connected to a Teflon® heated sample line. The sampled gas was conditioned by removing moisture prior to being introduced to the analyzers; therefore, measurement of O<sub>2</sub> and CO<sub>2</sub> concentrations correspond to standard dry gas conditions. Instrument response data were recorded using an ESC Model 8816 data acquisition system that monitored the analog output of the instrumental analyzers continuously and logged data as one-minute averages.

Prior to, and at the conclusion of each test, the instruments were calibrated using upscale calibration and zero gas to determine analyzer calibration error and system bias (described in Section 5.0 of this document). Sampling times were recorded on field data sheets.

Appendix 4 provides O<sub>2</sub> and CO<sub>2</sub> calculation sheets. Raw instrument response data are provided in Appendix 5.

## 4.4 Exhaust Gas Moisture Determination (USEPA Method 4)

Moisture content of the RICE exhaust gas was determined in accordance with USEPA Method 4 using a chilled impinger sampling train. Exhaust gas moisture content measurements were performed concurrently with the instrumental analyzer sampling periods. At the conclusion of each sampling period the moisture gain in the impingers was determined gravimetrically by weighing each impinger to determine net weight gain.

Appendix 3 provides moisture calculations and data sheets.



#### **4.5 NO<sub>x</sub> and CO Concentration Measurements (USEPA Methods 7E and 10)**

NO<sub>x</sub> and CO pollutant concentrations in the RICE exhaust gas streams were determined using a Thermo Environmental Instruments, Inc. (TEI) Model 42i High Level chemiluminescence NO<sub>x</sub> analyzer and a TEI Model 48i infrared CO analyzer.

Throughout each test period, a continuous sample of the engine exhaust gas was extracted from the stack using the Teflon® heated sample line and gas conditioning system and delivered to the instrumental analyzers. Instrument response for each analyzer was recorded on an ESC Model 8816 data acquisition system that logged data as one-minute averages. Prior to, and at the conclusion of each test, the instruments were calibrated using upscale calibration and zero gas to determine analyzer calibration error and system bias.

Appendix 4 provides CO and NO<sub>x</sub> calculation sheets. Raw instrument response data are provided in Appendix 5.

#### **4.6 Measurement of Volatile Organic Compounds (USEPA Method 25A/ALT-096)**

The VOC emission rate was determined by measuring the nonmethane hydrocarbon (NMHC or NMOC) concentration in the engine exhaust gas. NMHC pollutant concentration was determined using a TEI Model 55i Methane / Nonmethane hydrocarbon analyzer. The TEI 55i analyzer contains an internal gas chromatograph column that separates methane from non-methane components. The concentration of NMHC in the sampled gas stream, after separation from methane, is determined relative to a propane standard using a flame ionization detector in accordance with USEPA Method 25A.

The USEPA Office of Air Quality Planning and Standards (OAQPS) has issued an alternate test method approving the use of the TEI 55i-series analyzer as an effective instrument for measuring NMOC from gas-fueled RICE (ALT-096).

Samples of the exhaust gas were delivered directly to the instrumental analyzer using the Teflon® heated sample line to prevent condensation. The sample to the NMHC analyzer was not conditioned to remove moisture. Therefore, VOC measurements correspond to standard conditions with no moisture correction (wet basis).

Prior to, and at the conclusion of each test, the instrument was calibrated using mid-range calibration (propane) and zero gas to determine analyzer calibration error and system bias (described in Section 5.0 of this document).

Appendix 4 provides VOC calculation sheets. Raw instrument response data for the NMHC analyzer is provided in Appendix 5.



## 5.0 QA/QC Activities

---

### 5.1 Flow Measurement Equipment

Prior to arriving onsite, the instruments used during the source test to measure exhaust gas properties and velocity (Pitot tube and scale) were calibrated to specifications in the sampling methods.

The absence of cyclonic flow for each sampling location was verified using an S-type Pitot tube and oil manometer. The Pitot tube was positioned at each of the velocity traverse points with the planes of the face openings of the Pitot tube perpendicular to the stack cross-sectional plane. The Pitot tube was then rotated to determine the null angle (rotational angle as measured from the perpendicular, or reference, position at which the differential pressure is equal to zero).

### 5.2 NO<sub>x</sub> Converter Efficiency Test

The NO<sub>2</sub> – NO conversion efficiency of the Model 42i analyzer was verified prior to the testing program. A USEPA Protocol 1 certified concentration of NO<sub>2</sub> was injected directly into the analyzer, following the initial three-point calibration, to verify the analyzer's conversion efficiency. The analyzer's NO<sub>2</sub> – NO converter uses a catalyst at high temperatures to convert the NO<sub>2</sub> to NO for measurement. The conversion efficiency of the instrumental analyzer will be deemed acceptable if the measured NO<sub>x</sub> concentration is at least 90% of the expected value (within 10%).

The NO<sub>2</sub> – NO conversion efficiency test satisfied the USEPA Method 7E criteria (measured NO<sub>x</sub> concentration was 90.5% of the expected value).

### 5.3 Gas Divider Certification (USEPA Method 205)

A STEC Model SGD-710C 10-step gas divider was used to obtain appropriate calibration span gases. The ten-step STEC gas divider was NIST certified (within the last 12 months) with a primary flow standard in accordance with Method 205. When cut with an appropriate zero gas, the ten-step STEC gas divider delivered calibration gas values ranging from 0% to 100% (in 10% step increments) of the USEPA Protocol 1 calibration gas that was introduced into the system. The field evaluation procedures presented in Section 3.2 of Method 205 were followed prior to use of gas divider. The field evaluation yielded no errors greater than 2% of the triplicate measured average and no errors greater than 2% from the expected values.

### 5.4 Instrumental Analyzer Interference Check

The instrumental analyzers used to measure NO<sub>x</sub>, CO, O<sub>2</sub>, and CO<sub>2</sub> have had an interference response test preformed prior to their use in the field, pursuant to the interference response test procedures specified in USEPA Method 7E. The appropriate interference test gases (i.e., gases that would be encountered in the exhaust gas stream) were introduced into each analyzer, separately and as a mixture with the analyte that each analyzer is designed to measure. All of analyzers exhibited a composite deviation of less than 2.5% of the span for all measured interferent gases. No major analytical components of the analyzers have been replaced since performing the original interference tests.



## 5.5 Instrument Calibration and System Bias Checks

At the beginning of each day of the testing program, initial three-point instrument calibrations were performed for the NO<sub>x</sub>, CO, CO<sub>2</sub>, and O<sub>2</sub> analyzers by injecting calibration gas directly into the inlet sample port for each instrument. System bias checks were performed prior to and at the conclusion of each sampling period by introducing the upscale calibration gas and zero gas into the sampling system (at the base of the stainless-steel sampling probe prior to the particulate filter and Teflon® heated sample line) and determining the instrument response against the initial instrument calibration readings.

At the beginning of each test day, appropriate high-range, mid-range, and low-range span gases followed by a zero gas were introduced to the NMHC analyzer, in series at a tee connection, which is installed between the sample probe and the particulate filter, through a poppet check valve. After each one-hour test period, mid-range and zero gases were re-introduced in series at the tee connection in the sampling system to check against the method's performance specifications for calibration drift and zero drift error.

The instruments were calibrated with USEPA Protocol 1 certified concentrations of CO<sub>2</sub>, O<sub>2</sub>, NO<sub>x</sub>, and CO in nitrogen and zeroed using hydrocarbon free nitrogen. The NMHC (VOC) instrument was calibrated with USEPA Protocol 1 certified concentrations of propane in air and zeroed using hydrocarbon-free air. A STEC Model SGD-710C ten-step gas divider was used to obtain intermediate calibration gas concentrations as needed.

## 5.6 Determination of Exhaust Gas Stratification

A stratification test was performed for each RICE exhaust stack. The stainless-steel sample probe was positioned at sample points correlating to 16.7, 50.0 (centroid), and 83.3% of the stack diameter. Pollutant concentration data were recorded at each sample point for a minimum of twice the maximum system response time.

The recorded concentration data for the RICE exhaust stacks indicated that the measured O<sub>2</sub>, CO<sub>2</sub>, CO, and NO<sub>x</sub> concentrations did not vary by more than 5% of the mean across the stack diameter. Therefore, the RICE exhaust gas was considered to be unstratified and the compliance test sampling was performed at a single sampling location within each RICE exhaust stack.

## 5.7 System Response Time

The response time of the sampling system was determined prior to the compliance test program by introducing upscale gas and zero gas, in series, into the sampling system using a tee connection at the base of the sample probe. The elapsed time for the analyzer to display a reading of 95% of the expected concentration was determined using a stopwatch.

Sampling periods did not commence until the sampling probe had been in place for at least twice the greatest system response time.

## 5.8 Meter Box Calibrations

The dry gas meter sampling console used for moisture testing was calibrated prior to and after the testing program. This calibration uses the critical orifice calibration technique presented in USEPA Method 5. The metering console calibration exhibited no data outside the acceptable ranges presented in USEPA Method 5.

The digital pyrometer in the metering console was calibrated using a NIST traceable Omega® Model CL 23A temperature calibrator.

### **5.9 Cyclonic Flow Check**

The absence of cyclonic flow for each sampling location was verified using an S-type Pitot tube and oil manometer. The Pitot tube was positioned at multiple velocity traverse points with the planes of the face openings of the Pitot tube perpendicular to the stack cross-sectional plane. The Pitot tube was then rotated to determine the null angle (rotational angle as measured from the perpendicular, or reference, position at which the differential pressure is equal to zero).

Appendix 6 presents test equipment quality assurance data (NO<sub>2</sub> – NO conversion efficiency test data, instrument calibration and system bias check records, calibration gas certifications, interference test results, meter box calibration records, and field equipment calibration records).



## 6.0 Results

---

### 6.1 Test Results and Allowable Emission Limits

Engine operating data and air pollutant emission measurement results for each one-hour test period are presented in Table 6.1.

Engine No. 3 / EUENGINE3 has the following allowable emission limits specified in MI-ROP-N2804-2020:

- 6.9 lb/hr and 2.70 grams per brake horsepower hour (g/bhp-hr) for CO;
- 3.85 lb/hr and 1.50 g/bhp-hr for NO<sub>x</sub>; and
- 2.16 lb/hr and 0.84 g/bhp-hr for VOC.

The measured air pollutant emission rates for Engine No. 3 / EUENGINE3 are less than the allowable limits specified in MI-ROP-N5397-2019b.

### 6.2 Variations from Normal Sampling Procedures or Operating Conditions

The testing for all pollutants was performed in accordance with USEPA methods and the approved Stack Test Protocol. The RICE genset was operated within 10% of maximum output (800 kW generator output for CAT® G3516 RICE).

One (1) test run had to be aborted due to TEI Model 48i CO analyzer malfunction. Once the analyzer was repaired a full three-step instrument calibration was conducted before testing began. All aborted run data was recorded and is presented in Appendix 5.

RECEIVED

SEP 26 2023



**Table 6.1 Measured exhaust gas conditions and air pollutant emission rates for Engine No. 3 (EUENGINE3)**

<b>Test No.</b>	<b>1</b>	<b>2</b>	<b>3</b>	
<b>Test date</b>	<b>8/1/2023</b>	<b>8/1/2023</b>	<b>8/1/2023</b>	<b>Three Test</b>
<b>Test period (24-hr clock)</b>	<b>1348-1448</b>	<b>1509-1609</b>	<b>1630-1730</b>	<b>Average</b>
Fuel flowrate (scfm)	301	303	305	303
Generator output (kW)	803	801	802	802
Engine output (bhp)	1,120	1,118	1,119	1,119
LFG methane content (%)	53.1	53.0	52.8	53.0
<u>Exhaust Gas Composition</u>				
CO <sub>2</sub> content (% vol)	11.5	11.5	11.1	11.4
O <sub>2</sub> content (% vol)	8.48	8.50	8.96	8.65
Moisture (% vol)	13.1	12.3	12.8	12.7
Exhaust gas temperature (°F)	793.6	793.9	795.3	794.3
Exhaust gas flowrate (dscfm)	2,306	2,163	2,261	2,243
Exhaust gas flowrate (scfm)	2,653	2,466	2,594	2,571
<u>Nitrogen Oxides</u>				
NO <sub>x</sub> conc. (ppmvd)	72.6	64.9	62.5	66.7
NO <sub>x</sub> emissions (lb/hr)	1.20	1.01	1.01	1.07
<i>Permit Limit (lb/hr)</i>	-	-	-	3.87
NO <sub>x</sub> emissions (g/bhp-hr)	0.47	0.41	0.41	0.43
<i>Permit Limit (g/bhp-hr)</i>	-	-	-	1.5
<u>Carbon Monoxide</u>				
CO conc. (ppmvd)	661	645	631	646
CO emissions (lb/hr)	6.7	6.1	6.2	6.3
<i>Permit Limit (lb/hr)</i>	-	-	-	6.9
CO emissions (g/bhp-hr)	2.69	2.47	2.52	2.56
<i>Permit Limit (g/bhp-hr)</i>	-	-	-	2.7
<u>Volatile Organic Compounds</u>				
NMHC conc. (ppmv)	30.4	31.3	30.1	30.6
VOC emissions (lb/hr)	0.55	0.53	0.54	0.54
<i>Permit Limit (lb/hr)</i>	-	-	-	2.16
VOC emissions (g/bhp-hr)	0.23	0.22	0.22	0.22
<i>Permit Limit (g/bhp-hr)</i>	-	-	-	0.8


## APPENDIX 1

- RICE Engine Sample Port Diagram






CAT® Model G3516  
ICE Exhaust

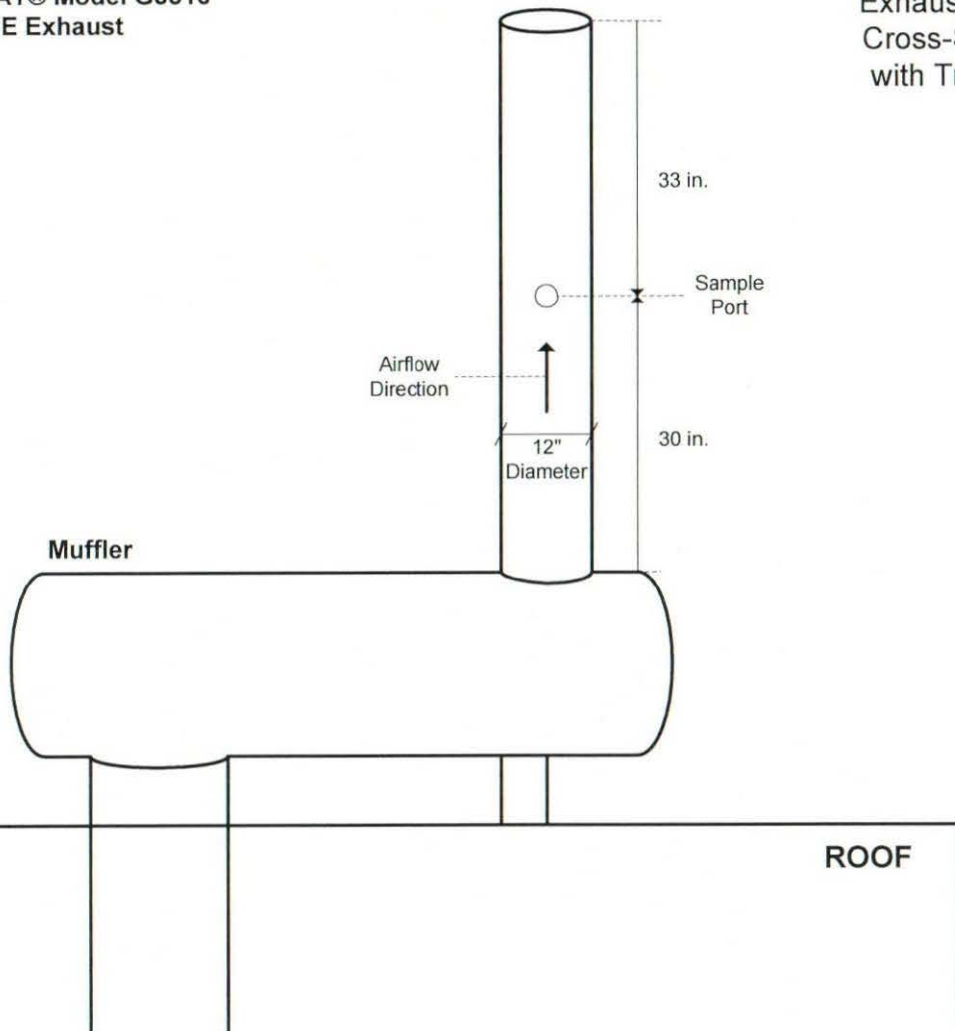

Exhaust Stack  
Cross-Section  
with Traverse  
Points

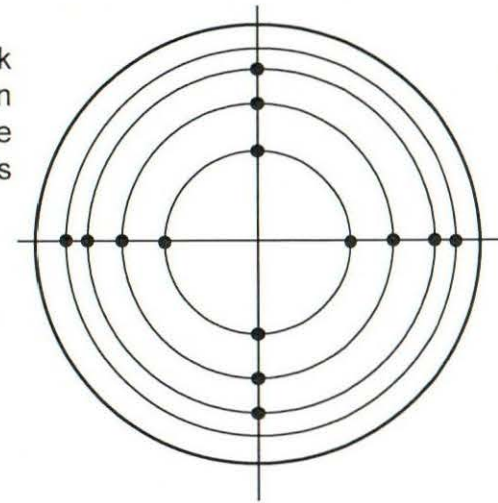

Velocity sample locations as  
measured from stack wall

Pt. #	in.
1	0.38
2	1.24
3	2.33
4	3.86
5	8.12
6	9.67
7	10.74
8	11.62

08/30/23 MSF	NANR Peoples Facility Exhaust Sample Location, CAT® G3516 ICE		
	Scale None	Sheet 1 of 1	Impact Comp. & Testing, Inc. Dwg. No. NANR-PEO-1



