


**MICHIGAN DEPARTMENT OF ENVIRONMENTAL QUALITY  
AIR QUALITY DIVISION**

March 12, 2008

**PERMIT TO INSTALL  
No. 46-08**

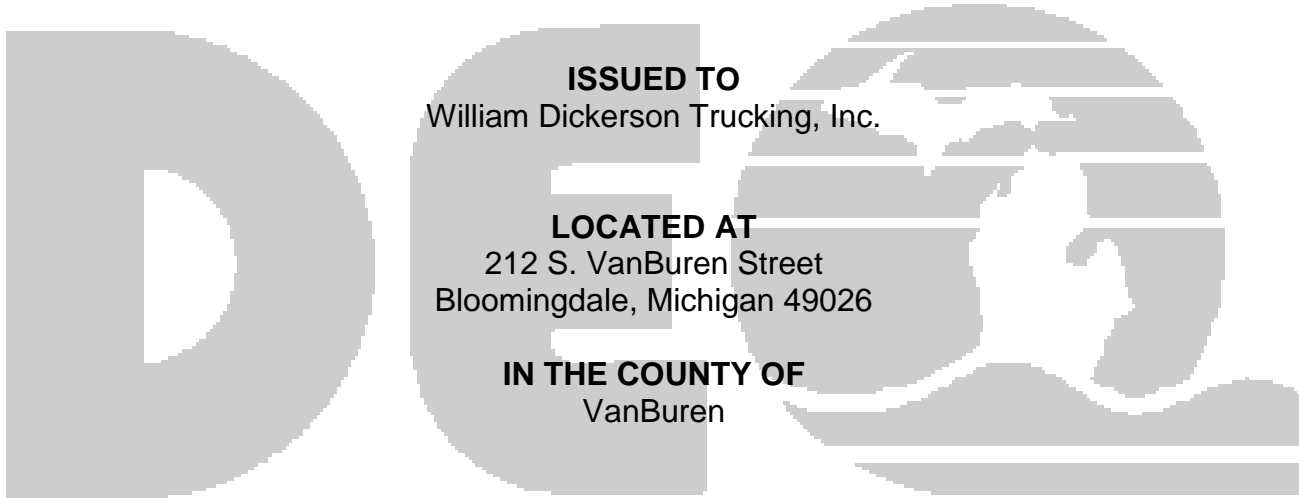

**ISSUED TO**  
William Dickerson Trucking, Inc.

**LOCATED AT**  
212 S. VanBuren Street  
Bloomington, Michigan 49026

**IN THE COUNTY OF**  
VanBuren

**STATE REGISTRATION NUMBER**  
N7979

The Air Quality Division has approved this Permit to Install, pursuant to the delegation of authority from the Michigan Department of Environmental Quality. This permit is hereby issued in accordance with and subject to Section 5505(1) of Article II, Chapter I, Part 55, Air Pollution Control, of the Natural Resources and Environmental Protection Act, 1994 PA 451, as amended. Pursuant to Air Pollution Control Rule 336.1201(1), this permit constitutes the permittee's authority to install the identified emission unit(s) in accordance with all administrative rules of the Department and the attached conditions. Operation of the emission unit(s) identified in this Permit to Install is allowed pursuant to Rule 336.1201(6).

|                                                                            |            |
|----------------------------------------------------------------------------|------------|
| DATE OF RECEIPT OF ALL INFORMATION REQUIRED BY RULE 203:<br><b>2/29/08</b> |            |
| DATE PERMIT TO INSTALL APPROVED:<br><b>3/12/08</b>                         | SIGNATURE: |
| DATE PERMIT VOIDED:                                                        | SIGNATURE: |
| DATE PERMIT REVOKED:                                                       | SIGNATURE: |

**PERMIT TO INSTALL**

**Table of Contents**

| <b>Section</b>                                                | <b>Page</b> |
|---------------------------------------------------------------|-------------|
| Alphabetical Listing of Common Abbreviations / Acronyms ..... | 2           |
| General Conditions .....                                      | 3           |
| Emission Unit Identification .....                            | 5           |
| Emission Unit Special Conditions.....                         | 6           |
| Emission Unit Special Conditions.....                         | 8           |
| Emission Unit Special Conditions.....                         | 9           |
| Appendices .....                                              | 10-11       |

**Common Abbreviations / Acronyms Used in this Permit to Install**

| Common Acronyms |                                                         | Pollutant/Measurement Abbreviations |                                                  |
|-----------------|---------------------------------------------------------|-------------------------------------|--------------------------------------------------|
| AQD             | Air Quality Division                                    | BTU                                 | British Thermal Unit                             |
| ANSI            | American National Standards Institute                   | °C                                  | Degrees Celsius                                  |
| BACT            | Best Available Control Technology                       | CO                                  | Carbon Monoxide                                  |
| CAA             | Clean Air Act                                           | dscf                                | Dry standard cubic foot                          |
| CEM             | Continuous Emission Monitoring                          | dscm                                | Dry standard cubic meter                         |
| CFR             | Code of Federal Regulations                             | °F                                  | Degrees Fahrenheit                               |
| COM             | Continuous Opacity Monitoring                           | gr                                  | Grains                                           |
| EPA             | Environmental Protection Agency                         | Hg                                  | Mercury                                          |
| EU              | Emission Unit                                           | hr                                  | Hour                                             |
| GACS            | Gallon of Applied Coating Solids                        | H <sub>2</sub> S                    | Hydrogen Sulfide                                 |
| GC              | General Condition                                       | HP                                  | Horsepower                                       |
| HAP             | Hazardous Air Pollutant                                 | lb                                  | Pound                                            |
| HVLP            | High Volume Low Pressure *                              | m                                   | Meter                                            |
| ID              | Identification                                          | mg                                  | Milligram                                        |
| LAER            | Lowest Achievable Emission Rate                         | mm                                  | Millimeter                                       |
| MACT            | Maximum Achievable Control Technology                   | MM                                  | Million                                          |
| MAERS           | Michigan Air Emissions Reporting System                 | MW                                  | Megawatts                                        |
| MAP             | Malfunction Abatement Plan                              | ng                                  | Nanogram                                         |
| MDEQ            | Michigan Department of Environmental Quality            | NO <sub>x</sub>                     | Oxides of Nitrogen                               |
| MIOSHA          | Michigan Occupational Safety & Health Administration    | PM                                  | Particulate Matter                               |
| MSDS            | Material Safety Data Sheet                              | PM-10                               | Particulate Matter less than 10 microns diameter |
| NESHAP          | National Emission Standard for Hazardous Air Pollutants | pph                                 | Pounds per hour                                  |
| NSPS            | New Source Performance Standards                        | ppm                                 | Parts per million                                |
| NSR             | New Source Review                                       | ppmv                                | Parts per million by volume                      |
| PS              | Performance Specification                               | ppmw                                | Parts per million by weight                      |
| PSD             | Prevention of Significant Deterioration                 | psia                                | Pounds per square inch absolute                  |
| PTE             | Permanent Total Enclosure                               | psig                                | Pounds per square inch gauge                     |
| PTI             | Permit to Install                                       | scf                                 | Standard cubic feet                              |
| RACT            | Reasonable Available Control Technology                 | sec                                 | Seconds                                          |
| SC              | Special Condition                                       | SO <sub>2</sub>                     | Sulfur Dioxide                                   |
| SCR             | Selective Catalytic Reduction                           | THC                                 | Total Hydrocarbons                               |
| SRN             | State Registration Number                               | tpy                                 | Tons per year                                    |
| TAC             | Toxic Air Contaminant                                   | µg                                  | Microgram                                        |
| TEQ             | Toxic Equivalent                                        | VOC                                 | Volatile Organic Compound                        |
| VE              | Visible Emissions                                       | yr                                  | Year                                             |

\* For High Volume Low Pressure (HVLP) applicators, the pressure measured at the HVLP gun air cap shall not exceed ten (10) pounds per square inch gauge (psig).

### GENERAL CONDITIONS

1. The process or process equipment covered by this permit shall not be reconstructed, relocated, or modified, unless a Permit to Install authorizing such action is issued by the Department, except to the extent such action is exempt from the Permit to Install requirements by any applicable rule. **(R 336.1201(1))**
2. If the installation, construction, reconstruction, relocation, or modification of the equipment for which this permit has been approved has not commenced within 18 months, or has been interrupted for 18 months, this permit shall become void unless otherwise authorized by the Department. Furthermore, the permittee or the designated authorized agent shall notify the Department via the Supervisor, Permit Section, Air Quality Division, Michigan Department of Environmental Quality, P.O. Box 30260, Lansing, Michigan 48909, if it is decided not to pursue the installation, construction, reconstruction, relocation, or modification of the equipment allowed by this Permit to Install. **(R 336.1201(4))**
3. If this Permit to Install is issued for a process or process equipment located at a stationary source that is not subject to the Renewable Operating Permit program requirements pursuant to R 336.1210, operation of the process or process equipment is allowed by this permit if the equipment performs in accordance with the terms and conditions of this Permit to Install. **(R 336.1201(6)(b))**
4. The Department may, after notice and opportunity for a hearing, revoke this Permit to Install if evidence indicates the process or process equipment is not performing in accordance with the terms and conditions of this permit or is violating the Department's rules or the Clean Air Act. **(R 336.1201(8), Section 5510 of Act 451, PA 1994)**
5. The AQD District Supervisor shall be notified, in writing, of a change in ownership or operational control of the stationary source or emission unit(s) authorized by this Permit to Install pursuant to R 336.1219. The notification shall include all of the information required by R 336.1219(1)(a) and (b). In addition, a new owner or operator must submit a written statement pursuant to R 336.1219(1)(c), agreeing to and accepting the terms and conditions of this Permit to Install, and shall notify the AQD District Supervisor of any change in the contact person for this Permit to Install. **(R 336.1219)**
6. Operation of this equipment shall not result in the emission of an air contaminant which causes injurious effects to human health or safety, animal life, plant life of significant economic value, or property, or which causes unreasonable interference with the comfortable enjoyment of life and property. **(R 336.1901)**
7. The permittee shall provide notice of an abnormal condition, start-up, shutdown, or malfunction that results in emissions of a hazardous or toxic air pollutant which continue for more than one hour in excess of any applicable standard or limitation, or emissions of any air contaminant continuing for more than two hours in excess of an applicable standard or limitation, as required in Rule 912, to the Department. The notice shall be provided not later than two business days after start-up, shutdown, or discovery of the abnormal condition or malfunction. Written reports, if required, must be filed with the Department within 10 days after the start-up or shutdown occurred, within 10 days after the abnormal conditions or malfunction has been corrected, or within 30 days of discovery of the abnormal condition or malfunction, whichever is first. The written reports shall include all of the information required in Rule 912(5). **(R 336.1912)**

8. Approval of this permit does not exempt the permittee from complying with any future applicable requirements which may be promulgated under Part 55 of 1994 PA 451, as amended or the Federal Clean Air Act.
9. Approval of this permit does not obviate the necessity of obtaining such permits or approvals from other units of government as required by law nor does it affect any liability for past violations under the Natural Resources and Environmental Protection Act, 1994 PA 451.
10. Operation of this equipment may be subject to other requirements of Part 55 of 1994 PA 451, as amended and the rules promulgated thereunder.
11. Except as provided in subrules (2) and (3) or unless the special conditions of the Permit to Install include an alternate opacity limit established pursuant to subrule (4) of R 336.1301, the permittee shall not cause or permit to be discharged into the outer air from a process or process equipment a visible emission of density greater than the most stringent of the following. The grading of visible emissions shall be determined in accordance with R 336.1303. **(R 336.1301)**
  - a) A six-minute average of 20 percent opacity, except for one six-minute average per hour of not more than 27 percent opacity.
  - b) A visible emission limit specified by an applicable federal new source performance standard.
  - c) A visible emission limit specified as a condition of this Permit to Install.
12. Collected air contaminants shall be removed as necessary to maintain the equipment at the required operating efficiency. The collection and disposal of air contaminants shall be performed in a manner so as to minimize the introduction of contaminants to the outer air. Transport of collected air contaminants in Priority I and II areas requires the use of material handling methods specified in R 336.1370(2). **(R 336.1370)**
13. The Department may require the permittee to conduct acceptable performance tests, at the permittee's expense, in accordance with R 336.2001 and R 336.2003, under any of the conditions listed in R 336.2001. **(R 336.2001)**

### SPECIAL CONDITIONS

#### Emission Unit Identification

| <b>Emission Unit ID</b>                                                                                                                        | <b>Emission Unit Description</b>                                                                                                                                                                                                                                                                         | <b>Stack Identification</b> |
|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| EU – Process                                                                                                                                   | A combination of process equipment (screens, crushers, feeders, conveyors, etc.) used to reduce larger materials down to smaller sizes, classify and sort materials into various product types, material handling and transporting of material to storage areas. Water sprays are used for dust control. | N/A – None                  |
| EU – Truck Traffic                                                                                                                             | Truck traffic for delivery of material products to customers; loader traffic associated with processing equipment, storage pile handling and loading delivery trucks. All commercial truck areas and unpaved road portions.                                                                              | N/A – None                  |
| EU – Storage                                                                                                                                   | Open area stock piles of various material sizes and product types. Water spray of material products are used when necessary for material storage piles.                                                                                                                                                  | N/A – None                  |
| Changes to the equipment described in this table are subject to the requirements of R 336.1201, except as allowed by R 336.1278 to R 336.1290. |                                                                                                                                                                                                                                                                                                          |                             |

**The following conditions apply to: EU - Process**

**Visible Emission Limits**

- 1.1 The permittee shall not operate any portion of EU – Process unless each portion of EU – Process meets the specific opacity limit listed in Appendix A of this permit. **(R 336.1301, R 336.2803, R 336.2804, 40 CFR 52.21 (c) & (d))**
- 1.2 Visible emissions from the drop point and transfer point portions of EU – Process shall not exceed 10 percent opacity. **(R 336.1301, R 336.2803, R 336.2804, 40 CFR 52.21 (c) & (d))**

**Material Usage Limits**

- 1.3 The permittee shall not process any asbestos tailing or asbestos containing waste materials in EU - Process pursuant to the National Emission Standards for Hazardous Air Pollutants, 40 CFR Part 61 Subpart M. **(40 CFR Part 61 Subpart M)**

**Process/Operational Limits**

- 1.4 The permittee shall not process more than one million (1,000,000) tons of material through EU – Process per 12-month rolling time period as determined at the end of each calendar month. **(R 336.1901, R 336.2803, R 336.2804, 40 CFR 52.21 (c) & (d))**
- 1.5 The permittee shall not operate EU - Process unless the program for continuous fugitive emissions control for all plant roadways, the plant yard, all material storage piles, and all material handling operations specified in Appendix B has been implemented and is maintained. **(R 336.1371, R 336.1901, R 336.2803, R 336.2804, 40 CFR 52.21 (c) & (d))**

**Equipment**

- 1.6 The permittee shall not operate any portion of EU – Process unless the equipment's specified control device is installed, maintained and operated in a satisfactory manner as listed in Appendix A. **(R 336.1901, R 336.1910, R 336.2803, R 336.2804, 40 CFR 52.21 (c) & (d))**
- 1.7 Within 45 days of issuance of this permit, the permittee shall label all equipment using the company ID Numbers in Appendix A, according to a method acceptable to the AQD District Supervisor. Labels shall be in a conspicuous location on the equipment. Within seven days of completing the labeling, the permittee shall notify the AQD District Supervisor, in writing, as to the date the labeling was completed. **(R 336.1201)**

**Testing**

- 1.8 The Department may require the permittee to conduct acceptable performance tests, at the permittee's expense, in order to verify compliance with the opacity limits specified in Special Condition 1.1 and R 336.1301. **(R 336.1301, R 336.2803, R 336.2804, 40 CFR 52.21 (c) & (d))**

**Recordkeeping/Reporting/Notification**

- 1.9 The permittee shall keep monthly records of the amount of material processed through EU – Process. Further the permittee shall calculate on a monthly basis, the yearly throughput rate based upon the most recent 12-month rolling time period. The permittee shall keep records of the amount of material processed on file for a period of at least five years and make them available to the Department upon request. **(R 336.2803, R 336.2804, 40 CFR 52.21 (c) & (d))**

**Portable Equipment**

1.10 The permittee shall not relocate EU - Process to any new geographical site in Michigan unless all of the following criteria are met:

- a) EU - Process shall not have any outstanding unresolved violations of any of the MDEQ Air Pollution Control rules, order, or permits; or federal air quality regulations.
- b) The installation of EU - Process at the geographical site shall be of a temporary nature lasting not more than 12 consecutive months.
- c) The permittee shall provide a notice of intent to relocate along with a proposed site plan to the AQD district office not less than 10 days prior to the scheduled relocation identifying the proposed new geographical site and the probable duration at the new site. The permittee shall clearly identify all residential or commercial establishments and places of public assembly within 1,000 feet of the proposed site of EU - Process on the proposed site plan.
- d) The permittee shall clearly post or maintain on site a copy of this approved permit and permit conditions in the operator's office or work station.
- e) The Department's Delegation of Authority does not authorize us to approve any site where there is a known unresolved objection without providing public notice including an opportunity for public comment and public meeting. **(Act 451 324.5511(3), R 336.1901, R 336.2803, R 336.2804, 40 CFR 52.21 (c) & (d))**



**The following conditions apply to: EU – Truck Traffic**

**Visible Emission Limits**

- 2.1 Visible emissions from all wheel loaders and all truck traffic, operated in conjunction with EU – Truck Traffic, shall not exceed 5 percent opacity. **(R 336.1301, R 336.2803, R 336.2804, 40 CFR 52.21(c) & (d))**

**Process/Operational Limits**

- 2.2 The permittee shall not operate EU – Truck Traffic unless the program for continuous fugitive emissions control for all plant roadways, the plant yard, all material storage piles, and all material handling operations specified in Appendix B has been implemented and is maintained. **(R 336.1371, R 336.1372, R 336.2803, R 336.2804, 40 CFR 52.21 (c) & (d), Act 451 324.5521)**

**The following conditions apply to: EU - Storage**

**Visible Emission Limits**

3.1 Visible emissions from each of the material storage piles maintained under EU - Storage shall not exceed 5 percent opacity. **(R 336.1301, R 336.2803, R 336.2804, 40 CFR 52.21(c) & (d))**

**Process/Operational Limits**

3.2 The permittee shall not operate EU - Storage unless the program for continuous fugitive emissions control for all plant roadways, the plant yard, all material storage piles, and all material handling operations specified in Appendix B has been implemented and is maintained. **(R 336.1371, R 336.1372, R 336.2803, R 336.2804, 40 CFR 52.21 (c) & (d), Act 451 324.5521)**



## **APPENDIX B**

### **Fugitive Dust Control Plan**

#### **I. Site Roadways / Plant Yard**

- A. The dust on the site roadways and the plant yard shall be controlled by applications of water, calcium chloride or other acceptable and approved fugitive dust control compounds. Applications of dust suppressants shall be done as often as necessary to meet all applicable emission limits. A record of all watering/dust suppressant applications shall be kept on file and be made available to the AQD upon request.
- B. All paved roadways and the plant yards shall be swept as needed between applications.
- C. Any material spillage on roads shall be cleaned up immediately.

#### **II. Plant**

The drop distance at each transfer point shall be reduced to the minimum the equipment can achieve. The transfer point from the re-circulating belt to the feed belt shall be equipped with an enclosed chute.

#### **III. Storage Piles**

- A. Stockpiling of all nonmetallic minerals shall be performed to minimize drop distance and control potential dust problems.
- B. Stockpiles shall be watered on an as needed basis in order to meet the opacity limit of 5 percent. Equipment to apply water or dust suppressant shall be available at the site or on call for use at the site within a given operating day. A record of all watering/dust suppressant applications shall be kept on file and be made available to the AQD upon request.

#### **IV. Truck Traffic**

On-site vehicles shall be loaded to prevent their contents from dropping, leaking, blowing or otherwise escaping. This shall be accomplished by loading so that no part of the load shall come in contact within 6 inches of the top of any side board, side panel or tailgate. Otherwise, the truck shall be tarped.

#### **V. AQD/MDEQ Inspection**

The provisions and procedures of this plan are subject to adjustment by written notification from the AQD if, following an inspection, the AQD finds the fugitive dust requirements and/or permitted emission limits are not being met.