


**MICHIGAN DEPARTMENT OF ENVIRONMENTAL QUALITY  
AIR QUALITY DIVISION**

November 26, 2008

**PERMIT TO INSTALL**

No. 283-03A

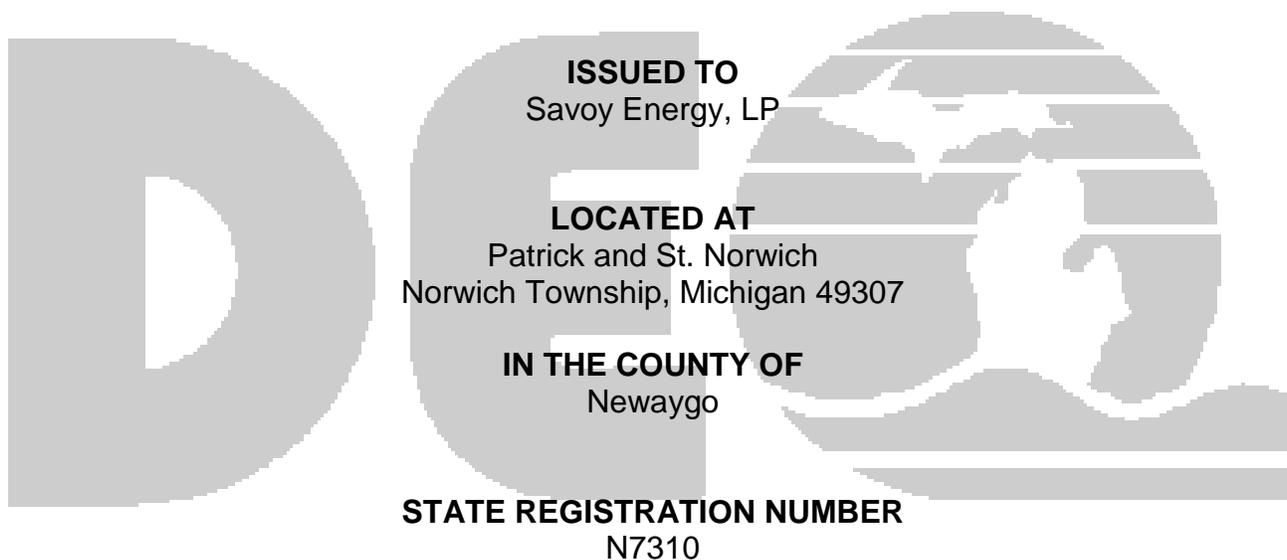

The Air Quality Division has approved this Permit to Install, pursuant to the delegation of authority from the Michigan Department of Environmental Quality. This permit is hereby issued in accordance with and subject to Section 5505(1) of Article II, Chapter I, Part 55, Air Pollution Control, of the Natural Resources and Environmental Protection Act, 1994 PA 451, as amended. Pursuant to Air Pollution Control Rule 336.1201(1), this permit constitutes the permittee's authority to install the identified emission unit(s) in accordance with all administrative rules of the Department and the attached conditions. Operation of the emission unit(s) identified in this Permit to Install is allowed pursuant to Rule 336.1201(6).

DATE OF RECEIPT OF ALL INFORMATION REQUIRED BY RULE 203: <b>11/21/2008</b>	
DATE PERMIT TO INSTALL APPROVED: <b>11/26/2008</b>	SIGNATURE:
DATE PERMIT VOIDED:	SIGNATURE:
DATE PERMIT REVOKED:	SIGNATURE:

**PERMIT TO INSTALL**

**Common Abbreviations / Acronyms**

<b>Common Acronyms</b>		<b>Pollutant / Measurement Abbreviations</b>	
AQD	Air Quality Division	BTU	British Thermal Unit
BACT	Best Available Control Technology	°C	Degrees Celsius
CAA	Clean Air Act	CO	Carbon Monoxide
CEM	Continuous Emission Monitoring	dscf	Dry standard cubic foot
CFR	Code of Federal Regulations	dscm	Dry standard cubic meter
COM	Continuous Opacity Monitoring	°F	Degrees Fahrenheit
EPA	Environmental Protection Agency	gr	Grains
EU	Emission Unit	Hg	Mercury
FG	Flexible Group	hr	Hour
GACS	Gallon of Applied Coating Solids	H <sub>2</sub> S	Hydrogen Sulfide
GC	General Condition	hp	Horsepower
HAP	Hazardous Air Pollutant	lb	Pound
HVLP	High Volume Low Pressure *	m	Meter
ID	Identification	mg	Milligram
LAER	Lowest Achievable Emission Rate	mm	Millimeter
MACT	Maximum Achievable Control Technology	MM	Million
MAERS	Michigan Air Emissions Reporting System	MW	Megawatts
MAP	Malfunction Abatement Plan	ng	Nanogram
MDEQ	Michigan Department of Environmental Quality	NO <sub>x</sub>	Oxides of Nitrogen
MSDS	Material Safety Data Sheet	PM	Particulate Matter
NESHAP	National Emission Standard for Hazardous Air Pollutants	PM10	PM less than 10 microns diameter
NSPS	New Source Performance Standards	PM2.5	PM less than 2.5 microns diameter
NSR	New Source Review	pph	Pounds per hour
PS	Performance Specification	ppm	Parts per million
PSD	Prevention of Significant Deterioration	ppmv	Parts per million by volume
PTE	Permanent Total Enclosure	ppmw	Parts per million by weight
PTI	Permit to Install	psia	Pounds per square inch absolute
RACT	Reasonably Available Control Technology	psig	Pounds per square inch gauge
ROP	Renewable Operating Permit	scf	Standard cubic feet
SC	Special Condition	sec	Seconds
SCR	Selective Catalytic Reduction	SO <sub>2</sub>	Sulfur Dioxide
SRN	State Registration Number	THC	Total Hydrocarbons
TAC	Toxic Air Contaminant	tpy	Tons per year
TEQ	Toxicity Equivalence Quotient	µg	Microgram
VE	Visible Emissions	VOC	Volatile Organic Compound
		yr	Year

\* For High Volume Low Pressure (HVLP) applicators, the pressure measured at the HVLP gun air cap shall not exceed ten (10) pounds per square inch gauge (psig).

### GENERAL CONDITIONS

1. The process or process equipment covered by this permit shall not be reconstructed, relocated, or modified, unless a Permit to Install authorizing such action is issued by the Department, except to the extent such action is exempt from the Permit to Install requirements by any applicable rule. **(R 336.1201(1))**
2. If the installation, construction, reconstruction, relocation, or modification of the equipment for which this permit has been approved has not commenced within 18 months, or has been interrupted for 18 months, this permit shall become void unless otherwise authorized by the Department. Furthermore, the permittee or the designated authorized agent shall notify the Department via the Supervisor, Permit Section, Air Quality Division, Michigan Department of Environmental Quality, P.O. Box 30260, Lansing, Michigan 48909, if it is decided not to pursue the installation, construction, reconstruction, relocation, or modification of the equipment allowed by this Permit to Install. **(R 336.1201(4))**
3. If this Permit to Install is issued for a process or process equipment located at a stationary source that is not subject to the Renewable Operating Permit program requirements pursuant to R 336.1210, operation of the process or process equipment is allowed by this permit if the equipment performs in accordance with the terms and conditions of this Permit to Install. **(R 336.1201(6)(b))**
4. The Department may, after notice and opportunity for a hearing, revoke this Permit to Install if evidence indicates the process or process equipment is not performing in accordance with the terms and conditions of this permit or is violating the Department's rules or the Clean Air Act. **(R 336.1201(8), Section 5510 of Act 451, PA 1994)**
5. The AQD District Supervisor shall be notified, in writing, of a change in ownership or operational control of the stationary source or emission unit(s) authorized by this Permit to Install pursuant to R 336.1219. The notification shall include all of the information required by R 336.1219(1)(a) and (b). In addition, a new owner or operator must submit a written statement pursuant to R 336.1219(1)(c), agreeing to and accepting the terms and conditions of this Permit to Install, and shall notify the AQD District Supervisor of any change in the contact person for this Permit to Install. **(R 336.1219)**
6. Operation of this equipment shall not result in the emission of an air contaminant which causes injurious effects to human health or safety, animal life, plant life of significant economic value, or property, or which causes unreasonable interference with the comfortable enjoyment of life and property. **(R 336.1901)**
7. The permittee shall provide notice of an abnormal condition, start-up, shutdown, or malfunction that results in emissions of a hazardous or toxic air pollutant which continue for more than one hour in excess of any applicable standard or limitation, or emissions of any air contaminant continuing for more than two hours in excess of an applicable standard or limitation, as required in Rule 912, to the Department. The notice shall be provided not later than two business days after start-up, shutdown, or discovery of the abnormal condition or malfunction. Written reports, if required, must be filed with the Department within 10 days after the start-up or shutdown occurred, within 10 days after the abnormal conditions or malfunction has been corrected, or within 30 days of discovery of the abnormal condition or malfunction, whichever is first. The written reports shall include all of the information required in Rule 912(5). **(R 336.1912)**
8. Approval of this permit does not exempt the permittee from complying with any future applicable requirements which may be promulgated under Part 55 of 1994 PA 451, as amended or the Federal Clean Air Act.
9. Approval of this permit does not obviate the necessity of obtaining such permits or approvals from other units of government as required by law nor does it affect any liability for past violations under the Natural Resources and Environmental Protection Act, 1994 PA 451.
10. Operation of this equipment may be subject to other requirements of Part 55 of 1994 PA 451, as amended and the rules promulgated thereunder.

11. Except as provided in subrules (2) and (3) or unless the special conditions of the Permit to Install include an alternate opacity limit established pursuant to subrule (4) of R 336.1301, the permittee shall not cause or permit to be discharged into the outer air from a process or process equipment a visible emission of density greater than the most stringent of the following. The grading of visible emissions shall be determined in accordance with R 336.1303. **(R 336.1301)**
  - a) A six-minute average of 20 percent opacity, except for one six-minute average per hour of not more than 27 percent opacity.
  - b) A visible emission limit specified by an applicable federal new source performance standard.
  - c) A visible emission limit specified as a condition of this permit to install.
  
12. Collected air contaminants shall be removed as necessary to maintain the equipment at the required operating efficiency. The collection and disposal of air contaminants shall be performed in a manner so as to minimize the introduction of contaminants to the outer air. Transport of collected air contaminants in Priority I and II areas requires the use of material handling methods specified in R 336.1370(2). **(R 336.1370)**
  
13. The Department may require the permittee to conduct acceptable performance tests, at the permittee's expense, in accordance with R 336.2001 and R 336.2003, under any of the conditions listed in R 336.2001. **(R 336.2001)**

**SPECIAL CONDITIONS**

**EMISSION UNIT SUMMARY TABLE**

The descriptions provided below are for informational purposes and do not constitute enforceable conditions.

Emission Unit ID	Emission Unit Description (Process Equipment & Control Devices)	Flexible Group ID
EUDEHY	Tri-ethylene glycol dehydration system with condenser and flash tank control that processes natural gas.	NA

**The following conditions apply to: EUDEHY**

**DESCRIPTION:** Tri-ethylene glycol dehydration system.

**Flexible Group ID:** NA

**POLLUTION CONTROL EQUIPMENT:** Condenser (2 ft x 10 ft), flash tank (exhaust sent to fuel system to be burned).

**I. EMISSION LIMITS**

Pollutant	Limit	Time Period/ Operating Scenario	Equipment	Testing / Monitoring Method	Underlying Applicable Requirements
1. VOC	2.5 tpy	12-month rolling time period as determined at the end of each calendar month.	EUDEHY	SC VI.4	R 336.1225, R 336.1702(a)
2. Benzene	0.23 tpy	12-month rolling time period as determined at the end of each calendar month.	EUDEHY	SC VI.4	R 336.1225

**II. MATERIAL LIMITS**

1. The permittee shall not use stripping gas in EUDEHY. (R 336.1225, R 336.1702(a), R 336.1901)
2. The permittee shall not process more than 400,000 standard cubic feet of natural gas per calendar day. (R 336.1225, R 336.1702(a), R 336.1901)

**III. PROCESS/OPERATIONAL RESTRICTIONS**

1. The permittee shall comply with all provisions of the National Emission Standards for Hazardous Air Pollutants, 40 CFR Part 63, Subpart HH, as they apply to EUDEHY by the compliance date of January 5, 2009. (40 CFR Part 63, Subpart HH)

#### **IV. DESIGN/EQUIPMENT PARAMETERS**

1. The permittee shall not operate EUDEHY unless the condenser is installed, maintained, and operated in a satisfactory manner. **(R 336.1225, R 336.1702(a), R 336.1901, R 336.1910)**
2. The permittee shall not operate EUDEHY unless the flash tank is installed, maintained, and operated in a satisfactory manner. Satisfactory operation includes routing the flash tank exhaust gas to the fuel system for destruction. **(R 336.1225, R 336.1702(a), R 336.1901, R 336.1910)**

#### **V. TESTING/SAMPLING**

Records shall be maintained on file for a period of five years. **(R 336.1201(3))**

1. At least once each calendar year the permittee shall obtain, by sampling, an analysis of the wet gas stream. The permittee shall analyze the sample for nitrogen, carbon dioxide, hydrogen sulfide, C1 through C6 series hydrocarbons, benzene, toluene, xylene, ethylbenzene, and heptanes plus. The permittee must submit any request for a change in the sampling frequency to the AQD District Supervisor for review and approval. **(R 336.1225, R 336.1702(a), R 336.1901)**

#### **VI. MONITORING/RECORDKEEPING**

Records shall be maintained on file for a period of five years. **(R 336.1201(3))**

1. The permittee shall complete all required calculations in a format acceptable to the AQD District Supervisor by the last day of the calendar month, for the previous calendar month, unless otherwise specified in any monitoring/recordkeeping special condition. **(R 336.1225, R 336.1702(a), R 336.1901)**
2. The permittee shall monitor, in a satisfactory manner, the natural gas processing rate of EUDEHY on a daily basis. **(R 336.1225, R 336.1702(a), R 336.1901, R 336.1910)**
3. If EUDEHY meets the exemption criteria in 40 CFR 63.764(e)(1)(i) for glycol dehydrators with actual annual average flow rate of natural gas less than 85,000 cubic meters per day, the actual flow rate of natural gas shall be determined using either of the procedures below:
  - a) The permittee shall install and operate a monitoring instrument that directly measures natural gas flow rate to the glycol dehydration unit with an accuracy of plus or minus 2 percent or better. The permittee shall convert annual natural gas flow rate to a daily average by dividing the annual flow rate by the number of days per year the glycol dehydration unit processed natural gas. **(40 CFR 63.772(b)(1)(i))**
  - b) The permittee shall document, to the AQD District Supervisor's satisfaction, that the actual annual average natural gas flow rate to the glycol dehydration unit is less than 85,000 cubic meters per day. **(40 CFR 63.772(b)(1)(ii))**
4. The permittee shall calculate the VOC and benzene emission rates from EUDEHY for each calendar month and 12-month rolling time period, using a method acceptable to the AQD District Supervisor. If GRI-GLYCalc (Version 3.0 or higher) is used to calculate the emission rates, the inputs to the model shall be representative of actual operating conditions of EUDEHY and shall include the most recent gas analysis data. The permittee must submit any request for a change in the calculation frequency to the AQD District Supervisor for review and approval. The permittee shall keep records of VOC and benzene emission rates on file at a location approved by the AQD District Supervisor and make them available to the Department upon request. **(R 336.1225, R 336.1702(a), R 336.1901)**
5. The permittee shall keep, in a satisfactory manner, records of the wet gas composition as determined through analysis of wet gas samples for EUDEHY, as required by SC V.1. The permittee shall keep all records on file at a location approved by the AQD District Supervisor and make them available to the Department upon request. **(R 336.1225, R 336.1702(a), R 336.1901)**
6. If EUDEHY complies with the exemption criteria in 40 CFR 63.764(e)(1)(i) for glycol dehydrators with actual annual average flow rate of natural gas less than 85,000 cubic meters per day, the permittee shall keep

records of the actual annual average natural gas throughput (in terms of natural gas flow rate to the glycol dehydration unit per day) as determined in accordance with SC VI.3. The permittee shall keep all records on file at a location approved by the AQD District Supervisor and make it available to the Department upon request. **(40 CFR 63.774(d)(1)(i))**

## **VII. REPORTING**

1. The permittee shall submit all applicable notifications and reports required by 40 CFR 63.775 by the dates specified in 40 CFR 63.775. **(40 CFR 63.775)**

## **VIII. STACK/VENT RESTRICTIONS**

The exhaust gases from the stacks listed in the table below shall be discharged unobstructed vertically upwards to the ambient air unless otherwise noted:

<b>Stack &amp; Vent ID</b>	<b>Maximum Exhaust Dimensions (inches)</b>	<b>Minimum Height Above Ground (feet)</b>	<b>Underlying Applicable Requirements</b>
1. SVDEHY	10	12	R 336.1225, R 336.1901

## **IX. OTHER REQUIREMENTS**

1. The permittee shall not use EUDEHY to process wells other than those specified in this permit application without prior notification to the AQD. **(R 336.1225, R 336.1901)**